

**PROFESSIONAL INSULATING,
SEALING AND BONDING**

PRODUCT CATALOGUE 2023 / 2024

**Variety from Austria: the right
solution for every purpose**

INSEBO®
SOLUTIONS THAT MATTER

WE ARE WS INSEBO – AND YOU ARE VERY WELCOME!



Alexander Auerbach-Spielberger
Managing Partner

Based in Austria, appreciated around the globe – with passion we support you in your construction project.

We are and will remain a valued Austrian quality provider in construction chemistry.

The brand INSEBO® is new, but continues the decades of tradition of our company combined with modern power. Everything that we do is always driven by our own aspiration to be the best. With a diverse product portfolio and specialist know-how, our customers can rely on WS INSEBO.

The combination of well-trained, long-term employees, decades of industry experience coupled with the strong sense of innovation will continue to form the strong foundation of our family-run company in the future.

Enthusiastic customers worldwide are always our greatest ambition.



Dipl.-Wirt.-Ing. Wolfgang Blumschein
CEO

Our customers are at the centre of all our actions, ideas, initiatives, and efforts.

We are known for a high degree of flexibility, often making the impossible possible and going the extra mile for our clients.

We aim to listen to our customers and understand the changing demands and trends in order to provide appropriate solutions in collaboration.

We invite you to engage in this dialogue with us!

TABLE OF CONTENTS



4	Button description
6	Company
8	Sealants and accessories
26	Adhesives
32	PU-Foams and accessories
48	Joint sealing tapes
62	Lubricants, sprays & cleaners
66	Processing tools
74	General sales conditions

BUTTON DESCRIPTION

Tested product properties:

In this catalogue, the following symbols are used for labelling:

-  flame retardant product tested according to DIN 4102 or EN 13501
-  normally flammable product tested according to DIN 4102 or EN 13501
-  Germany-wide recycling system for used PU foam cans
For further details visit www.pdr.de
-  noise tested product
-  tested thermal insulation properties
-  system tested product for INSEBO® window connection systems according to ÖNORM B 5320
-  Tested for foam adhesives for External Thermal Insulation Composite Systems (ETICS)
For further details visit www.eota.eu
-  tested airtightness
-  tested driving rain tightness
-  tested food compatibility

-  This product meets the requirements for ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.).
-  This product meets the highest requirements for pre-compressed joint sealing tapes according to DIN 18542 (BG1) both for window installations according to ÖNORM B 5320 as well as for facade sealings according to ÖNORM B 6400 and other (construction) connection joints.
-  This product meets all requirements for not directly weathered, pre-compressed joint sealing tapes according to DIN 18542 (BG2) both for window installations according to ÖNORM B 5320 and for other (construction) connection joints.
-  This product meets the increased requirements for airtightness on the room side according to DIN 18542, both for window installations according to ÖNORM B 5320 and for other (construction) connecting joints.
-  This product meets all requirements for not directly weathered, precompressed multi-functional joint sealing tapes and the increased requirements for airtightness on the room side according to DIN 18542 (MF2) both for window installation according to ÖNORM B 5320 and for other (construction) connection joints.
-  CE-marked sealant with Declaration of Performance according to EN 15651
-  Over many years EMICODE® EC1 has proven itself as a standard for very low emission products. All products awarded with this sign fulfill very high environmental and health claims. For further details visit www.emicode.com
-  Since 2010, EMICODE® EC1^{PLUS} is the new, even stricter category for very low emission products. For further details visit www.emicode.com
-  The online platform baubook.info pursues the goal of supporting ecological building and renovation by means of targeted product information. Products marked with this button were evaluated according to the criteria given there.
-  The French VOC label indicates the number of emissions a product emits. The labelling is based on concentration limits for formaldehyde and 10 other individual substances as well as for the sum of VOCs (TVOCs).

Values that we live and are happy to share with you

As an Austrian quality provider, we are always aware of our responsibility to our customers.

A value that we live every day is our high technical competence. We write the rest of our success story by keeping our response and delivery times short and our innovation power high, by producing exceptional products, and selling them at fair prices.

Healthy growth, climate-friendly development

In close cooperation with our management, we, as a long-standing team of authorised signatories, achieve together with our employees the goal of preserving what has been tried and tested and at the same time constantly developing ourselves further.

In close cooperation with our management, as a well-coordinated procurement team with long-standing experience, we aim to preserve what has been proven and to continually develop ourselves. Our latest investments have been dedicated to sustainability and future security. Since the beginning of 2023, our plant in Himberg near Vienna has been producing its own solar power, and half of our fleet is electric. We have also expanded our production capacities.

In addition to our proven classics, this catalogue features numerous new products.

We look forward to the new season with you!

Your Management-Team



ppa. Ing. Wolfgang Wodak
Head of Production Management

ppa. Vesna Rumpold-Bosteale, MA
Head of Sales Management

ppa. Dipl.-Ing. (FH) Thomas Koternetz, MSc
Head of Products, Marketing, Development
and Quality Assurance

WHAT WE CAN DO FOR YOUR PROJECT

One company - many advantages

We didn't become who we are overnight. We have built it up over decades of dedicated collaboration: as a multi-professional team, with our customers and suppliers, striving to constantly keep improving. An overview, of what we are willing to give in return can be found below.

Service

We make things as easy as possible for our customers.

- **Customer care**
Our service and solution-oriented approach convinces when it comes to inquiries about offers as well as orders.
- **Delivery reliability**
We don't talk about service - we live it. This includes meeting our deadlines.
- **Incognito on demand**
If you wish, we can deliver to your customers incognito so that the delivery is only assigned to your company.
- **long-term stable team**
We maintain fair and long-term relationships with our employees, which is why our customers' contact persons also remain unchanged over the years.
- **Marketing and point of sales service**
We support your sales by bringing customers into the store - and our store set-up expertise and ready-made advertising and display materials right along with it.

Values

Lived values, honest information.

- **Private owner**
Our company is privately owned, the size of its team is manageable and managed in a value-oriented manner.
- **Honesty inside and out**
We offer honest declarations, full transparency and lived values.
- **Appreciative handling**
We treat all of our customers, employees and suppliers with the same level of appreciation and respect.
- **Value creation in Austria**
The people in our region should benefit from what we do and what we achieve. Our company headquarters including laboratory, warehouse and production facility are based in Austria. And that is where they will remain in the future.

Individuality

Solutions as flexible as you are.

- **Special requests**
Made exactly for your needs: We design your product and your solution.
- **Small-scale production**
Demand-based volumes: even the production of small quantities is part of our service.
- **Only what is needed**
We also sell by the box because not every project requires a large quantity.

Competence

We research, learn and know.

- **Technical questions**
We strive to fulfil your requests quickly and competently. We are particularly convincing when it comes to sealing compounds, adhesives, PU foams and accessories as well as standard-compliant window installations.
- **Own laboratory**
At our location near Vienna we research, develop and improve products in-house.
- **Training**
Over the course of the years, we have acquired comprehensive know-how and are happy to share this knowledge with you. Ask us about training courses at your location, virtually or in-house.
- **Collaborative project processing**
We're by your side for your construction project. In person and on site.
- **Quality right from the start**
We purchase raw materials from reliable partners, whose understanding of quality is as strict as our own.
- **Special knowledge**
We have experts in-house for chemicals law, transport regulations, packaging guidelines, CE marking and other areas. If necessary, we can supplement our own team of experts with specialized professionals from our large network of experts and testing institutes.

Operational strength

We are real go-getters.

- **Flexibility**
Our efficient, family-like structure allows us to react, produce, and deliver quickly.
- **Speed**
Short reaction times, handpicked logistics partners: we deliver goods in stock almost always within two working days throughout Austria. What we do not have in stock, we produce as quickly as possible.
- **Agreements**
We store your products and deliver them to you on demand within two working days. We fill in any gaps that arise in the stock level through rapid reproduction.
- **Private label production**
We produce your own brand - with extremely flexible box and pallet sizes, label designing and a number of optional additional services.
- **Trade shows**
You can find us at trade fairs and as supporters of your own in-house exhibitions.

Security

What we do, protects our customers.

- **Standard conformity**
We know the standards, we understand them and we help shaping them - through our association work, for example at FEICA, FCIO, QG-WDS and ÖNORM.
- **Cooperation with testing institutes**
We work closely with renowned testing institutes - such as Holz-forschung Austria, IBS Linz, ift Rosenheim, TU Graz, MA 39 or OFI Vienna.
- **Audits**
Regular audits (also on behalf of our customers) are an integral part of our quality management.
- **Complete examination**
We check every single production batch before going out for sale.
- **Product documentation**
All relevant information about our products, such as safety data sheets, declarations of performance and technical leaflets, can be found on our website on a daily basis and ready to download.
- **No unpleasant surprises**
With our focus on product and legal security, our customers are also on the safe side.

PRODUCT OVERVIEW

SEALANTS

When nothing should go in, out, or through in the end: Seal it up - with sealing compounds from INSEBO®.

INSEBO® sealants are made of high-quality silicones and acrylates and accompany you through construction and renovation. We also offer specialty products for windows, facades, natural stone, switchboards and parquet flooring.

- 10 Profi Sanitärsilikon 25
- 10 Silikon A
- 11 Sanitärsilikon
- 11 Silikon HT
- 12 Profi Neutralsilikon 25 **NEW!**
- 12 Universalsilikon matt
- 13 Silikon SL
- 13 Silikon FO
- 14 Universalsilikon + Stein
- 14 Fassadenanschluss
- 15 Silikon SF
- 15 Silikon N Basic
- 15 Schalungssilikon
- 16 Acrylat D
- 16 Acrylat Basic **NEW!**
- 17 Acrylat AC
- 17 Maleracryl
- 18 Parkettfugenmasse
- 19 Acrylat RF
- 19 Acrylat SF
- 20 MS PowerFlex 25
- 21 MS Transparent
- 21 MS Hybrid
- 22 Spenglermasse
- 22 Grundierung OP
- 22 Grundierung GP
- 23 Glättmittel
- 23 Clipdüsen für Kartuschen 5 Stk. SB-Packung
- 23 Spezialdüsen-Set SB-Packung
- 24 PE-Rundschnüre
- 25 Drahtaufsteller
- 25 Kartuschendispenser 5x5
- 25 Kartuschendispenser 8x6

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website (insebo.com).

Profi Sanitärsilikon 25

top silicone for the bathroom and kitchen

- acetate-crosslinking, highly elastic sealant
- suitable for aluminum, ceramics, glass and plastic in kitchen, sanitary and wet areas
- highest elasticity
- suitable for floor, wall and ceiling joints
- anti-mold-tested according to ISO 846
- elongation at break according to EN 8339: 300 %
- tested food compatibility
- temperature resistant up to +180 °C
- UV and ageing resistant
- color stable
- excellent processability
- high abrasion resistance
- waterproof
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMICODE EC1^{PLUS}

Item no.	Order designation	Content
202-250	Profi Sanitärsilikon 25 300 ml transparent	300 ml cartridge
202-251	Profi Sanitärsilikon 25 300 ml weiß	300 ml cartridge
202-267	Profi Sanitärsilikon 25 300 ml pergamon altweiß	300 ml cartridge
202-257	Profi Sanitärsilikon 25 300 ml jasmin cremeweiß	300 ml cartridge
202-252	Profi Sanitärsilikon 25 300 ml manhattan	300 ml cartridge
202-256	Profi Sanitärsilikon 25 300 ml dark manhattan	300 ml cartridge
202-258	Profi Sanitärsilikon 25 300 ml grau	300 ml cartridge
202-263	Profi Sanitärsilikon 25 300 ml seidengrau	300 ml cartridge
202-253	Profi Sanitärsilikon 25 300 ml steingrau	300 ml cartridge
202-264	Profi Sanitärsilikon 25 300 ml anthrazit	300 ml cartridge
202-265	Profi Sanitärsilikon 25 300 ml basalt dunkelgrau	300 ml cartridge
202-259	Profi Sanitärsilikon 25 300 ml schwarz	300 ml cartridge
202-254	Profi Sanitärsilikon 25 300 ml bahama beige	300 ml cartridge
202-267	Profi Sanitärsilikon 25 300 ml camel beige	300 ml cartridge
202-260	Profi Sanitärsilikon 25 300 ml terra cotta	300 ml cartridge
202-266	Profi Sanitärsilikon 25 300 ml miel ockerbraun	300 ml cartridge
202-261	Profi Sanitärsilikon 25 300 ml mittelbraun	300 ml cartridge
202-262	Profi Sanitärsilikon 25 300 ml bali dunkelbraun	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



Sanitärsilikon

highly elastic silicone - ideal for the bathroom

- acetate-crosslinking, highly elastic sealant
- suitable for aluminum, ceramics, glass and plastic in kitchen, sanitary and wet areas
- anti-mold-tested according to ISO 846
- elongation at break according to EN 8339: 280 %
- tested food compatibility
- temperature resistant up to +150 °C
- UV and ageing resistant
- good processability
- waterproof

Item no.	Order designation	Content
202-001	Sanitärsilikon 300 ml transparent	300 ml cartridge
202-061	Sanitärsilikon 300 ml weiß	300 ml cartridge
202-104	Sanitärsilikon 300 ml pergamon altweiß	300 ml cartridge
202-009	Sanitärsilikon 300 ml jasmin cremeweiß	300 ml cartridge
202-062	Sanitärsilikon 300 ml manhattan	300 ml cartridge
202-122	Sanitärsilikon 300 ml dark manhattan	300 ml cartridge
202-063	Sanitärsilikon 300 ml grau	300 ml cartridge
202-105	Sanitärsilikon 300 ml seidengrau	300 ml cartridge
202-116	Sanitärsilikon 300 ml steingrau	300 ml cartridge
202-117	Sanitärsilikon 300 ml anthrazit	300 ml cartridge
202-124	Sanitärsilikon 300 ml basalt dunkelgrau	300 ml cartridge
202-064	Sanitärsilikon 300 ml schwarz	300 ml cartridge
202-011	Sanitärsilikon 300 ml bahama beige	300 ml cartridge
202-125	Sanitärsilikon 300 ml camel beige	300 ml cartridge
202-106	Sanitärsilikon 300 ml terra cotta	300 ml cartridge
202-118	Sanitärsilikon 300 ml miel ockerbraun	300 ml cartridge
202-123	Sanitärsilikon 300 ml mittelbraun	300 ml cartridge
202-107	Sanitärsilikon 300 ml bali dunkelbraun	300 ml cartridge
202-316	Sanitärsilikon 400 ml steingrau	400 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet



Silikon A

cost-effective alternative for sanitary and kitchen

- acetate-curing silicone for sealings between stainless steel, aluminum, ceramic and glass
- rapid skin formation and curing
- anti-mold-tested according to ISO 846
- elongation at break according to EN 8339: 250 %
- temperature resistant up to +150 °C
- UV and ageing resistant

Item no.	Order designation	Content
205-001	Silikon A 300 ml transparent	300 ml cartridge
205-002	Silikon A 300 ml perlweiß	300 ml cartridge
205-007	Silikon A 300 ml grau	300 ml cartridge
205-015	Silikon A 300 ml dunkelbraun	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



Silikon HT

temperature resistant silicone up to +280 °C

- acetate-crosslinking silicone sealant
- for heat-stressed joints, such as in areas of cast iron boilers, fireplaces and tiled stoves
- suitable for ceramics and similar materials
- for joints between non-corrodible metals, e.g. as a „liquid“ seal in engine constructions
- for interior and exterior use
- temperature resistant up to +280 °C
- highly elastic, resistant to chemicals and ageing

Item no.	Order designation	Content
207-001	Silikon HT 300 ml rotbraun	300 ml cartridge
207-006	Silikon HT 300 ml schwarz	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



Profi Neutralsilikon 25

high quality, neutral-crosslinking silicone sealant

- sealant for interior and exterior areas
- for joints even in difficult areas, such as wet areas, swimming pools and pool surroundings, natural and artificial stones, floors and other expansion joints
- suitable for gluing mirrors
- suitable for countless building materials
- anti-mold-tested according to ISO 846
- high volume stability during curing
- high elasticity 25LM
- temperature resistant up to +180 °C
- tested food compability
- very good resilience
- not corrosive to metals
- UV and aging resistant
- stable
- good smoothing properties
- waterproof
- solvent and phthalate free
- very low emission – EMICODE EC1^{PLUS}
- NO MEKO – no butanone oxime is produced during processing
- Class A+ according to French VOC emissions regulations

Item number	Order designation	Content
207-071	Profi Neutralsilikon 25 300 ml milchig-transparent	300 ml cartridge
207-070	Profi Neutralsilikon 25 300 ml weiß	300 ml cartridge
207-074	Profi Neutralsilikon 25 300 ml bahama	300 ml cartridge
207-072	Profi Neutralsilikon 25 300 ml dark manhattan	300 ml cartridge
207-073	Profi Neutralsilikon 25 300 ml grau	300 ml cartridge
207-075	Profi Neutralsilikon 25 300 ml anthrazit	300 ml cartridge
207-076	Profi Neutralsilikon 25 300 ml schwarz	300 ml cartridge
207-410	Profi Neutralsilikon 25 600 ml weiß	600 ml aluminium bag
207-413	Profi Neutralsilikon 25 600 ml grau	600 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet

Universalsilikon matt

particularly high-quality, neutral-crosslinking, structured surface

- matte and lightly textured surface
- for joints in indoor and outdoor areas, e.g. kitchens, bathrooms, pool trims, natural and artificial stones, floors and other expansion joints
- UV and aging resistant
- stable
- good smoothing properties
- solvent and phthalate free
- very low emission – EMICODE EC1^{PLUS}
- NO MEKO – no butanone oxime is produced during processing

Item number	Order designation	Content
207-036	Universalsilikon 300 ml schimmerweiß matt	300 ml cartridge
207-029	Universalsilikon 300 ml perlbeige matt	300 ml cartridge
207-035	Universalsilikon 300 ml hellgrau matt	300 ml cartridge
207-027	Universalsilikon 300 ml mittelgrau matt	300 ml cartridge
207-028	Universalsilikon 300 ml felsgrau matt	300 ml cartridge
207-033	Universalsilikon 300 ml zementgrau matt	300 ml cartridge
207-034	Universalsilikon 300 ml schiefergrau matt	300 ml cartridge
207-037	Universalsilikon 300 ml schwarz matt	300 ml cartridge

Packing unit: 12 cartridges/box, 1.248 cartridges/pallet

NEW
PRODUCT



Silikon SL

highly elastic particularly versatile sealant based on alkoxy

- neutral-crosslinking, highly elastic sealant based on alkoxy
- suitable for metal construction, wood, glass, plastic, concrete, plaster, masonry, ceramics and many other building materials
- also applicable on damp surfaces
- for sealings of window connections according to ÖNORM B 5320
- highest elasticity
- elongation at break according to EN 8339: 300%
- temperature resistant up to +180 °C
- UV and ageing resistant
- very good smoothing properties
- odorless
- meets the requirements of ecological building materials
- very low emission – EMICODE EC1^{PLUS}

Item no.	Order designation	Content
204-002	Silikon SL 300 ml milchig-transparent	300 ml cartridge
204-003	Silikon SL 300 ml weiß	300 ml cartridge
204-004	Silikon SL 300 ml grau	300 ml cartridge
204-005	Silikon SL 300 ml dunkelbraun	300 ml cartridge
204-006	Silikon SL 300 ml schwarz	300 ml cartridge
204-007	Silikon SL 300 ml anthrazitgrau	300 ml cartridge
204-303	Silikon SL 600 ml anthrazitgrau	600 ml aluminium bag
204-304	Silikon SL 600 ml milchig-transparent	600 ml aluminium bag
204-305	Silikon SL 600 ml weiß	600 ml aluminium bag
204-306	Silikon SL 600 ml schwarz	600 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet

Silikon FO

for window connection joints according to ÖNORM B 5320 and much more

- versatile, neutral crosslinking, highly elastic sealant
- for sealing window connection joints in- and outdoors according to ÖNORM B 5320
- for gluing and sealing glazing and window joints to the building structure
- suitable for wet areas
- for weather-stressed joints
- highest elasticity
- tested food compability
- normally flammable according to EN 13501-1
- elongation at break according to EN 8339: 300 %
- temperature resistant up to +180 °C
- UV and ageing resistant
- waterproof
- very low emission – EMICODE EC1^{PLUS}
- NO MEKO – no butanone oxime is produced during processing
- Class A+ according to French VOC emissions regulations

Item no.	Order designation	Content
203-900	Silikon FO 300 ml milchig-transparent	300 ml cartridge
203-901	Silikon FO 300 ml weiß	300 ml cartridge
203-902	Silikon FO 300 ml dark manhattan	300 ml cartridge
203-903	Silikon FO 300 ml mittelbraun	300 ml cartridge
203-921	Silikon FO 400 ml milchig-transparent	400 ml aluminium bag
203-920	Silikon FO 400 ml weiß	400 ml aluminium bag
203-950	Silikon FO 600 ml milchig-transparent	600 ml aluminium bag
203-951	Silikon FO 600 ml weiß	600 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet



Universalsilikon + Stein

versatile neutral-crosslinking silicone sealant, e.g. for artificial and natural stone

- sealant for interior and exterior areas
- for joints even in difficult areas, such as wet areas, swimming pools and pool surroundings, natural and artificial stones, floors and other expansion joints
- suitable for gluing mirrors
- suitable for countless building materials
- anti-mold-tested according to ISO 846
- high volume stability during curing
- high elasticity 20LM
- temperature resistant up to +180 °C
- tested food compability
- very good resilience
- not corrosive to metals
- UV and aging resistant
- stable
- good smoothing properties
- waterproof
- solvent and phthalate free
- very low emission – EMICODE EC1
- NO MEKO – no butanone oxime is produced during processing

Item number	Order designation	Content
207-021	Universalsilikon + Stein 300 ml milchig-transparent	300 ml cartridge
207-020	Universalsilikon + Stein 300 ml weiß	300 ml cartridge
207-024	Universalsilikon + Stein 300 ml bahama	300 ml cartridge
207-022	Universalsilikon + Stein 300 ml dark manhattan	300 ml cartridge
207-023	Universalsilikon + Stein 300 ml grau	300 ml cartridge
207-025	Universalsilikon + Stein 300 ml anthrazit	300 ml cartridge
207-026	Universalsilikon + Stein 300 ml schwarz	300 ml cartridge
207-420	Universalsilikon + Stein 600 ml weiß	600 ml aluminium bag
207-423	Universalsilikon + Stein 600 ml grau	600 ml aluminium bag

Packing unit: 12 cartridges or 20 aluminium bags/box, 1.248 cartridges/pallet



Silikon SF

neutral cross-linking, highly elastic silicone sealant

- neutrally crosslinking silicone sealant
- for sealing building expansion joints
- suitable for inner connection joints at window mountings according to ÖNORM B 5320
- excellent adhesion to glass, metal, concrete, clinker and many plastics
- UV and ageing resistant
- highest elasticity according to EN 15651-1: Class 25LM
- application as fire protection silicone, e.g. for fire protection windows, doors and gates. Important: follow the installation instructions of the element manufacturer
- flame retardant – B1 according to DIN 4102-1
- NO MEKO – no butanone oxime is produced during processing

Item no.	Order designation	Content
207-002	Silikon SF 300 ml grau	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



Silikon N-Basic

construction silicone

- neutrally crosslinking silicone
- for joints in indoor and outdoor areas
- elongation at break: 250% according to EN 8339
- temperature resistant up to +160 °C
- UV and ageing resistant
- NO MEKO – no butanone oxime is produced during processing

Item no.	Order designation	Content
206-101	Silikon N-Basic 300 ml transparent	300 ml cartridge
206-102	Silikon N-Basic 300 ml weiß	300 ml cartridge
206-107	Silikon N-Basic 300ml grau	300 ml cartridge
206-310	Silikon N-Basic 600ml transparent	600 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet



Fassadenanschluss

ultra soft and highly elastic

- extremely soft, neutral-crosslinking and elastic silicone sealant
- suitable for sealing window sills as well as for building expansion joints, building connection joints and joints in precast constructions
- suitable for sealing the inner and outer window connection according to ÖNORM B 5320
- optimal for joints between conservatory and house wall
- for interior and exterior use
- highest elasticity
- elongation at break according to EN 8339: 300 %
- stress value: 0.08 N / mm² at 25 % elongation
- temperature resistant up to +180 °C
- UV-stable and resistant to ageing
- NO MEKO – no butanone oxime is produced during processing

Item no.	Order designation	Content
203-850	Fassadenanschluss 300 ml milchig-transparent	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



Schalungssilikon

special silicone for formwork panels

- neutrally crosslinking silicone sealant for sealing and filling joints in formwork panels
- suitable for repairing silicon joints of formwork panels
- very good adhesion on galvanized metal frames
- temperature resistant up to +180 °C
- very high abrasion resistance
- fast curing
- UV and ageing resistant
- very good smoothing properties
- particularly durable
- permanently elastic
- waterproof
- NO MEKO – no butanone oxime is produced during processing

Item no.	Order designation	Content
203-700	Schalungssilikon Fassware	approx. 200 l barrel
203-701	Schalungssilikon 300 ml grau	300 ml cartridge
203-705	Schalungssilikon 600 ml grau	600 ml aluminium bag

Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet



Acrylat D

particularly elastic acrylic sealant

- odorless acrylic dispersion sealant
- suitable for sealings in interior and facade areas on absorbent building materials, such as plaster, concrete, wood and masonry
- suitable for inner connection joints at window mountings according to ÖNORM B 5320
- processable on damp substrates
- for interior and exterior use
- very good elasticity
- paintable
- can be easily plastered over
- can be used with a spatula
- water soluble in fresh condition - easy cleaning of tools
- protect against permanent standing water
- protect against rain during processing and drying time
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMI CODE EC1^{PLUS}

Item no.	Order designation	Content
208-003	Acrylat D 300 ml weiß	300 ml cartridge
208-007	Acrylat D 300 ml grau	300 ml cartridge
208-015	Acrylat D 300 ml braun	300 ml cartridge
208-203	Acrylat D 400 ml weiß	400 ml aluminium bag
208-303	Acrylat D 600 ml weiß	600 ml aluminium bag
Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet		



Acrylat Basic

paintable filling compound

- for filling of cracks, holes and joints
- suitable for brick, concrete and plaster
- ready to use
- processable on damp substrates
- for interior and exterior use
- paintable
- can be easily plastered over
- can be used with a spatula
- water soluble in fresh condition - easy cleaning of tools
- protect against permanent standing water
- protect against rain during processing and drying time
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
208-024	Acrylat Basic 300 ml weiß	300 ml cartridge
208-025	Acrylat Basic 300 ml grau	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Acrylat AC

paintable and ready to use acrylic sealant

- acrylic dispersion sealant
- suitable for filling joints, cracks and outbreaks with little movement
- suitable for connection joints with little movement
- for absorbent building materials such as plaster, concrete, masonry and wood
- for interior and exterior use
- stretchable
- protect against permanent standing water
- protect against rain during processing and curing time
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item no.	Order designation	Content
208-103	Acrylat AC 300 ml weiß	300 ml cartridge
208-107	Acrylat AC 300 ml grau	300 ml cartridge
208-403	Acrylat AC 400 ml weiß	400 ml aluminium bag
208-503	Acrylat AC 600 ml weiß	600 ml aluminium bag
Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet		



Maleracryl

outstanding smoothable acrylic sealant

- acrylic dispersion sealant for joints and cracks in walls and ceilings
- also suitable for many plastics and for corrosion-protected metals, such as aluminum
- for absorbent building materials such as plaster, concrete, brick, aerated concrete, plasterboard, masonry, wood and fiber cement
- processable on damp substrates
- paintable
- particularly soft and therefore particularly good smoothing properties
- protect against permanent standing water
- protect against rain during processing and curing time
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMI CODE EC1^{PLUS}





Item no.	Order designation	Content
208-110	Maleracryl 300 ml weiß	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Parkettfugenmasse

solvent-free acrylic sealant for parquet floors

- sealant for connection joints and repairs in parquet and laminate floors as well as skirting boards
- for repairing defects in wooden doors, stairs and furniture
- balances minor movements
- paintable
- ready to use
- silicone-free
- odorless
- water soluble in fresh condition - easy cleaning of tools
- protect against permanent standing water
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item no.	Order designation	Content
211-001	 Parkettfugenmasse 300 ml buche	300 ml cartridge
211-002	 Parkettfugenmasse 300 ml esche/fichte	300 ml cartridge
211-003	 Parkettfugenmasse 300 ml eiche	300 ml cartridge
211-006	 Parkettfugenmasse 300 ml ahorn	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Acrylat RF

with plaster structure

- ready-to-use smoothing compound
- for repairing cracks in masonry and plaster
- for repair works on facades
- for filling unevennesses
- for interior and exterior use
- protect against permanent standing water
- protect against rain during processing and curing time
- solvent-free
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)



Item no.	Order designation	Content
218-003	 Acrylat RF 300 ml weiß	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Acrylat SF

hardly inflammable acrylic sealant

- acrylic dispersion sealant
- for fire-retardant components, such as windows and doors, according to element manufacturer specifications
- particularly suitable for grouting fire protection panels in interior work
- good adhesion on fire protection foam as well as absorbent building materials such as plaster, concrete, masonry, etc.
- flame retardant – B1 according to DIN 4102-1
- „non-burning droplets“ according to DIN 4102-16
- paintable
- protect against permanent standing water
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item no.	Order designation	Content
208-803	 Acrylat SF 300 ml weiß	300 ml cartridge
208-807	 Acrylat SF 300 ml grau	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		









MS PowerFlex 25

sealant with excellent adhesion on countless materials

- high quality sealant and adhesive based on hybrid polymers
- for bonding and sealing a wide variety of materials; ideal for home, garden, industry, construction and craft
- for concrete, masonry, plaster, wood, metals and plastic
- for connection and movement joints in indoor and outdoor areas, especially suitable for joints in building construction
- suitable for sealing the interior and exterior window connection joint according to ÖNORM B 5320
- very good adhesion even on damp surfaces
- highest elasticity
- anti-mold-tested according to ISO 846
- normally flammable according to EN 13501
- permissible permanent joint movement 25%
- tested food compatibility
- UV and ageing resistant
- good smoothing properties
- neutrally crosslinking
- paintable
- highly elastic
- solvent-free
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMI CODE EC1^{PLUS}




Item no.	Order designation	Content
209-069	 MS PowerFlex 25 290 ml weiß	290 ml cartridge
209-070	 MS PowerFlex 25 290 ml grau	290 ml cartridge
209-071	 MS PowerFlex 25 290 ml graubraun	290 ml cartridge
209-072	 MS PowerFlex 25 290 ml schwarz	290 ml cartridge
209-301	 MS PowerFlex 25 600 ml weiß	600 ml aluminium bag
209-302	 MS PowerFlex 25 600 ml grau	600ml aluminium bag
Packing unit: 12 cartridges or 20 aluminium bags/box, 1.248 cartridges/pallet		

MS Transparent

transparent sealant based on hybrid polymers

- for bonding and sealing a wide variety of materials; for home, industry, construction and crafts
- for concrete, masonry, plaster, wood, metals and plastic
- for joints in the interior
- good adhesion even on slightly damp surfaces
- easy processing
- not corrosive to metals
- high volume stability during curing
- ageing-resistant
- stretchable
- neutrally curing
- paintable
- contains no phthalates, halogen compounds, flame retardants, etc.

Item no.	Order designation	Content
209-077	 MS Transparent 290 ml	290 ml cartridge
Packing unit: 12 cartridges/box, 1.248 cartridges/pallet		









MS Hybrid

particularly versatile sealant and adhesive

- sealant and adhesive based on hybrid polymers
- for bonding and sealing a wide variety of materials; ideal for home, garden, industry, construction and craft
- for concrete, natural stone, masonry, plaster, wood, metals and plastic
- for connection and movement joints in indoor and outdoor areas, especially for joints in building construction
- very good elasticity
- permissible permanent joint movement 20%
- tested food compatibility
- UV and ageing resistant
- very good smoothing properties
- neutrally curing
- paintable
- solvent-free
- highly elastic
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMI CODE EC1^{PLUS}



Item no.	Order designation	Content
209-096	 MS Hybrid 290 ml weiß	290 ml cartridge
209-102	 MS Hybrid 290 ml manhattan	290 ml cartridge
209-103	 MS Hybrid 290 ml dark manhattan	290 ml cartridge
209-104	 MS Hybrid 290 ml steingrau	290 ml cartridge
209-097	 MS Hybrid 290 ml grau	290 ml cartridge
209-098	 MS Hybrid 290 ml schwarz	290 ml cartridge
Packing unit: 12 cartridges/box, 1.248 cartridges/pallet		

Spenglermasse

processable on damp substrates

- elastic, silicone-free synthetic rubber
- very good adhesion on most surfaces
- suitable for facade, glass, sanitary, ventilation and roof areas
- bitumen-compatible
- for interior and exterior use
- very good moisture resistance
- UV-resistant
- Weather resistant
- paintable with most paints
- contains solvents

Item number	Order designation	Content
209-009	Spenglermasse 300 ml glasklar	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Grundierung OP

primer for silicones and MS sealants on porous substrates

- primer for porous, absorbent substrates
- for porous, absorbent, neutral and alkaline substrates, such as concrete, aerated concrete, bricks, fiber cement as well as artificial and natural stones
- apply a thin layer with a brush and let dry
- as a bonding agent it ensures improved adhesion of the sealant, especially on difficult substrates
- contains solvents
- flash off time: approx. 30 minutes
- only for professional and industrial use (not for private users)

Item number	Order designation	Content
212-021	Grundierung OP	400 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		



Grundierung GP

primer for silicones and MS sealants on closed-pored substrates

- primer for non-absorbent substrates
- suitable for metals, coatings (such as glazes), for facade paints and plastics (such as acrylic glass, polycarbonate and polyester)
- apply a thin layer with a brush and let dry
- as a bonding agent it ensures improved adhesion of the sealant, especially on difficult substrates
- contains solvents
- flash off time: approx. 30 minutes
- only for professional and industrial use (not for private users)

Item number	Order designation	Content
212-022	Grundierung GP	400 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		



Glättmittel

perfect joints in a few easy steps

- significantly better smoothing properties of sealants
- ready to use mixture
- suitable for silicone and MS-hybrid sealants and adhesives
- prevents sealant damages that can occur when smoothing with detergent mixtures
- application:
 1. Insert sealants into joints, overfilling slightly.
 2. Spray joint with smoothing agent.
 3. Cover removal aid (spatula, stick, etc.) in smoothing agent.
 4. Repeat step 2 & 3 as needed until the joint is smooth.

Item number	Order designation	Content
305-001	Glättmittel 450 ml	450 ml spray bottle
305-100	Glättmittel 5 l	5 l canister
Packing unit: 6 spray bottles/box, 2 canisters/box		



Clipdüsen für Kartuschen 5 Stk. SB-Packung

replacement nozzles for all INSEBO® adhesives and sealants

- 3 pcs. cartridge tips for silicones, acrylates and other sealants
- 2 pcs. with cap
- suitable for all INSEBO® cartridges

Item number	Order designation
213-033	Clipdüsen für Kartuschen 5 Stk. SB-Packung



Spezialdüsen-Set SB-Packung

nozzle set for hard-to-reach areas

- 360° nozzle: for angled corners
- spreader nozzle 30 mm: for extensive applications
- nozzle extension: for deep, inaccessible areas
- v-seam nozzle: for a V-shaped sealing or adhesive bead

Item number	Order designation
213-034	Spezialdüsen-Set SB-Packung




PE-Rundschnüre

PE round cord - closed-cell structure prevents water absorption

- especially in building waterproofing to avoid triple-flank adhesion
- due to the neutral properties also applicable to absorbent materials
- compatible with all sealants
- complies with DIN 18540 for expansion joint design
- elastic
- flexible
- resistant to aging

Item no.	Order designation	Diameter	Box contents
410-009	PE-Rundschnur 6 mm SB-Packung	6 mm	10 rm
410-001	PE-Rundschnur 6 mm Kleinpackung	6 mm	100 rm
410-015	PE-Rundschnur 6 mm 2.500 rm	6 mm	2.500 rm
410-010	PE-Rundschnur 8 mm SB-Packung	8 mm	10 rm
410-002	PE-Rundschnur 8 mm Kleinpackung	8 mm	100 rm
410-016	PE-Rundschnur 8 mm 1.500 rm	8 mm	1.500 rm
410-011	PE-Rundschnur 10 mm SB-Packung	10 mm	5 rm
410-003	PE-Rundschnur 10 mm Kleinpackung	10 mm	100 rm
410-017	PE-Rundschnur 10 mm 1.150 rm	10 mm	1.150 rm
410-012	PE-Rundschnur 15 mm SB-Packung	15 mm	5 rm
410-004	PE-Rundschnur 15 mm Kleinpackung	15 mm	100 rm
410-018	PE-Rundschnur 15 mm 550 rm	15 mm	550 rm
410-013	PE-Rundschnur 20 mm SB-Packung	20 mm	5 rm
410-005	PE-Rundschnur 20 mm Kleinpackung	20 mm	50 rm
410-019	PE-Rundschnur 20 mm 350 rm	20 mm	350 rm
410-014	PE-Rundschnur 25 mm SB-Packung	25 mm	5 rm
410-006	PE-Rundschnur 25 mm Kleinpackung	25 mm	50 rm
410-020	PE-Rundschnur 25 mm 200 rm	25 mm	200 rm
410-007	PE-Rundschnur 30 mm Kleinpackung	30 mm	25 rm
410-021	PE-Rundschnur 30 mm 160 rm	30 mm	160 rm
410-022	PE-Rundschnur 40 mm 270 rm	40 mm	270 rm
410-023	PE-Rundschnur 50 mm 180 rm	50 mm	180 rm

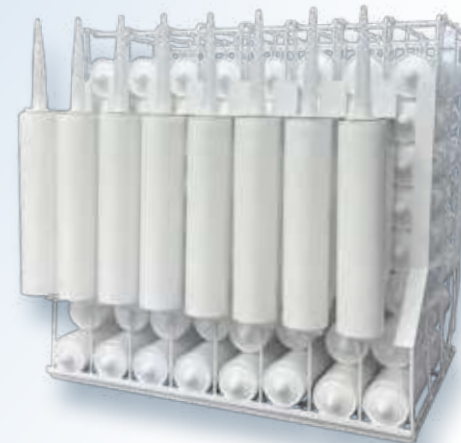

Drahtaufsteller

stand-up display for sealing compounds filled in cartridges

- especially for cartridges
- stable cartridge dispenser made of wire
- holds 64 cartridges (8 rows of 8 each)
- overall dimensions
width: 47 cm
height: 44 cm
depth: 31 cm
- protective strip on the front to prevent unintentional slipping out of the cartridges

Item number	Order designation
801-003	Drahtaufsteller

Kartuschendispenser 5x5

for the presentation of sealants and adhesives filled in cartridges

- especially for cartridges with filling capacity up to 310 ml
- stable cartridge dispenser made of plastic
- holds 25 cartridges (5 rows of 5 each)
- overall dimensions
width: 31 cm
length: 31 cm
height: 4 cm
- company neutral design without logo

Item number	Order designation
801-002	Kartuschendispenser 5x5




Kartuschendispenser 8x6

for the presentation of sealants and adhesives filled in cartridges

- especially for cartridges with filling capacity up to 310 ml
- stable cartridge dispenser made of plastic
- holds 48 cartridges (8 rows of 6 each)
- overall dimensions
width: 49 cm
length: 37 cm
height: 4 cm
- with INSEBO® logo on one side

Item number	Order designation
801-016	Kartuschendispenser 8x6

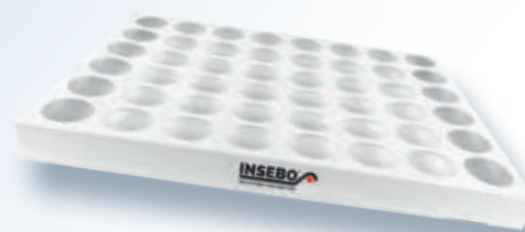

PRODUCT OVERVIEW

ADHESIVES

To make sure that everything holds, as it should: bonding and sealing with INSEBO®.

INSEBO® adhesives are constantly being developed. They are made for everyday use, for application on a wide range of surfaces and suitable for many materials and applications.

- 28 Montagekleber TK
- 28 Montagekleber Spezial
- 29 Montagekleber Tempo
- 29 Dichtkleber F
- 30 MS Kleber
- 30 MS Kleber Tempo
- 31 PU-Kleber Spezial
- 31 PU-Kleber Power

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website (insebo.com).

Montagekleber TK

versatile, solvent-free building adhesive

- solvent-free, stable, water-based dispersion adhesive
- for bonding tiles, polystyrene, wood panels, baseboards, window sills, foams, etc. on brick, concrete, plaster, mortar and wood
- high breaking load (10 kg/cm²)
- the adhesive surface must be absorbent
- adhesive layer thickness: at least 2 mm
- UV and ageing resistant
- paintable
- also suitable as filler for cracks and holes in masonry
- color: off-white
- the substrate should be dry, otherwise the drying time is significantly extended
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
210-001	Montagekleber TK 300 ml	300 ml cartridge
210-003	Montagekleber TK 5 kg	5 kg bucket
210-004	Montagekleber TK 12 kg	12 kg bucket
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Montagekleber Tempo

versatile building adhesive with high bond strength from the beginning

- elastic, solvent-free dispersion adhesive with particularly high initial adhesion
- for bonding tiles, polystyrene, wood panels, baseboards, window sills, corrosion-protected metals, foams, etc. on bricks, concrete, plaster, mortar and wood
- particularly suitable for applications where forces can occur very quickly
- remains correctable for a short time
- excellent adhesion on many substrates
- at least one adhesive surface should be absorbent
- adhesive strength of approx. 1.3 N/mm² already after 5 minutes on a dry, absorbent substrate
- UV and ageing resistant
- paintable
- color: white
- the substrate should be dry, otherwise the drying time is significantly extended.
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
210-071	Montagekleber Tempo 300 ml	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Montagekleber Spezial

versatile building adhesive with particularly good adhesion

- solvent-free construction adhesive with high adhesive power
- suitable for materials such as wood, stone, plastic, corrosion-protected sheet metal, aluminum, ceramic tiles, foam boards, etc.
- suitable for claddings, baseboards, plastic-coated wall panels, etc.
- adheres to absorbent and non-absorbent surfaces
- at least one adhesive surface should be absorbent
- UV and ageing resistant
- paintable
- color: white
- the substrate should be dry, otherwise the drying time is significantly extended.
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
210-005	Montagekleber Spezial 300 ml	300 ml cartridge
Packing unit: 20 cartridges/box, 1.200 cartridges/pallet		



Dichtkleber F

adhesive with good initial adhesion to vapor breaks and wind barriers

- special adhesive for airtight connections of foils and fleece on masonry in the interior construction according to DIN 4108-7
- bonding of vapor brake lanes in attic floor extensions
- for bonding and sealing foil tapes, in particular overlaps and folds
- for air-tight and impact-proof sealing of window connection foils as well as for sealing the hole in the windowsill corner area
- excellent adhesion to polyolefins, e.g. films made from polyethylene (PE) and polypropylene (PP)
- easy processing - no adhesive stringing
- no pressure bars required
- high temperature resistance
- processable from -5 °C
- solvent-free
- color: fresh – light blue, dried – grey blue
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMICODE EC1^{PLUS}




Item number	Order designation	Content
210-034	Dichtkleber F 300 ml hellblau	300 ml cartridge
210-033	Dichtkleber F 600 ml hellblau	600 ml aluminium bag
Packing unit: 20 cartridges or aluminium bag/box, 1.200 cartridges/pallet		



MS Kleber

high-quality adhesive based on hybrid polymers

- for elastic bonding in building, car-body, vehicle, caravan and container construction
- for absorbent and non-absorbent surfaces, inside and outside, e.g. wood, stone, tiles, concrete, plaster, stoneware, natural stone, glass mosaic, cable ducts, clinker, brick, polystyrene, many plastics and various metals
- suitable for gluing mirrors
- particularly high breaking load (>20 kg / cm²)
- good UV and weather resistance
- vibration dampening
- paintable
- odorless
- permanently elastic
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
209-200	 MS Kleber 290 ml weiß	290 ml cartridge
209-201	 MS Kleber 290 ml grau	290 ml cartridge
209-202	 MS Kleber 290 ml schwarz	290 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



PU-Kleber Spezial

highest adhesive power for wood, concrete, masonry, plastic and metal

- 1-component polyurethane adhesive that reacts with humidity
- excellent adhesive power
- for absorbent and non-absorbent surfaces, inside and outside, e.g. wood, stone, ceramics, concrete, bricks, many plastics and various metals
- for rigid and extremely strong adhesive joints
- Fills and bridges uneven surfaces and irregularities
- water resistant
- paintable
- color: white

Item number	Order designation	Content
210-011	PU-Kleber Spezial 300 ml	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



MS Kleber Tempo

particularly stable – high initial adhesion – High Tack

- for elastic bonding in building, car-body, vehicle, caravan and container construction
- for absorbent and non-absorbent surfaces, inside and outside, e.g. wood, stone, tiles, concrete, plaster, stoneware, natural stone, glass mosaic, cable ducts, clinker, brick, polystyrene, many plastics and various metals
- suitable for gluing mirrors
- particularly high breaking load (22 kg/cm²)
- high initial adhesion due to exceptional stability
- easy to use: simply apply, press on, release
- In many cases, no temporary fixation necessary
- reaches final strength after complete reaction
- practical V-seam nozzle for precise dosing
- good UV and weather resistance
- vibration dampening
- paintable
- odorless
- permanently elastic
- color: white
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)

Item number	Order designation	Content
209-400	MS Kleber Tempo 290 ml weiß	290 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



PU-Kleber Power

waterproof, high-strength and volume-resistant PU adhesive

- moisture-reactive, volume stable, 1-component polyurethane adhesive
- excellent adhesive power
- for absorbent and non-absorbent surfaces, inside and outside, e.g. wood, stone, tiles, concrete, plaster, stoneware, natural stone, cable ducts, clinker, bricks, polystyrene, many plastics and various metals
- for bondings in wall areas and where short-term fixing is not possible e.g. bondings of wooden steps on concrete.
- rigid and extremely strong adhesive bond
- paintable
- color: yellowish

Item number	Order designation	Content
210-046	PU-Kleber Power 300 ml	300 ml cartridge

Packing unit: 20 cartridges/box, 1.200 cartridges/pallet



PRODUCT OVERVIEW

PU-FOAMS

Have you already foamed today?
Our ambitious range of PU foams offers the right product for every requirement.

1- or 2-component foams, plastic adapters or dispensing guns: INSEBO® PU foams combine the know-how of many decades with the innovative strength of our in-house development laboratory.

- 34 Pistolenschaum 48
- 34 Pistolenschaum Betongrau
- 35 Volumenschaum 65
- 35 Pistolenschaum Tempo
- 35 Pistolenschaum Basic
- 36 All Seasons Pistolenschaum
- 36 Winter-Pistolenschaum
- 37 Pistolenschaum Mega
- 37 Pistolenschaum B2
- 38 Weichzellschaum
- 38 Weichzellschaum B2
- 39 Pistolen-Brunnenschaum
- 39 Pistolen-Brandschutzschaum
- 40 Dämmplattenkleber
- 40 Fugendichtschaum **NEW!**
- 41 B1 Füllschaum
- 41 Klebeschaum DS
- 42 2K Schaum
- 43 2K Tempo
- 43 2K Turbo
- 43 2K Rapidschaum
- 44 Montage- und Füllschaum
- 44 All Seasons Montageschaum
- 45 Montageschaum B2
- 45 Montageschaum Basic
- 45 Fensterschaum
- 46 Montage-Brandschutzschaum
- 46 Brunnenschaum
- 47 PU-Schaumadapter 5 Stk. SB-Packung
- 47 PU-Universal-Reiniger

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website (insebo.com).

Pistolenschaum 48

noise tested gun foam with high yield

- polyurethane foam for processing with the dispensing gun
- 1-component PU foam with excellent adhesion on conventional building surfaces, such as concrete, masonry, wood, polystyrene, chipboard, insulation materials, metals and many plastics
- perfect for filling cavities in ceilings, walls and floors; for filling joints, e.g. between window or door frames and masonry; for filling conduit slits, wall openings and much more
- very high yield
- especially for professional users
- can be processed at ambient temperatures above 3 °C
- economical in operation
- tested as noise protection foam by the ift Rosenheim;
- joint sound insulation: 62 dB
- excellent thermal insulation; thermal conductivity: $\lambda = 0,0365 \text{ W/mK}$ according to EN 12667
- dimensionally stable and pressure-free after curing
- skin forming time: approx. 8 to 12 minutes
- cuttable after approx. 20 to 30 minutes
- very low emission – EMICODE EC1^{PLUS}
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: yellow
- yield: 32 liters free-foamed per 500 ml can
- yield: 48 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-961	Profi Pistolenschaum 32 500 ml*	500 ml can
108-001	Pistolenschaum 48 750 ml	750 ml can
108-900	Profi Pistolenschaum 48 750 ml*	750 ml can
108-021	Pistolenschaum-Set klein (3 x foam, 1 x cleaner, 1 x dispensing gun)	
108-030	Pistolenschaum-Set groß (9 x foam, 1 x cleaner, 1 x dispensing gun)	

Packing unit: 12 cans/box, 56 boxes/pallet

*only for professional users - will be delivered without gloves



Pistolenschaum Betongrau

grey gun foam with high yield

- concrete-grey polyurethane foam for application with the dispensing gun
- 1-component PU foam with excellent adhesion on conventional building surfaces
- especially for professional users
- further applications and properties as INSEBO® Pistolenschaum 48
- low post-expansion
- skin forming time: approx. 8 to 12 minutes
- cuttable after approx. 20 to 30 minutes
- very low emission – EMICODE EC1^{PLUS}
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: grey
- yield: 48 liters free foamed per 750 ml can

Item number	Order designation	Content
108-080	Pistolenschaum Betongrau 750 ml	750 ml can
108-902	Profi Pistolenschaum Betongrau 750 ml*	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

*only for professional users - will be delivered without gloves



Volumenschaum 65

more foam content in same can size

- 1-component PU foam with excellent adhesion on conventional building surfaces, such as concrete, masonry, wood, polystyrene, chipboard, insulation materials, metals and many plastics
- tested as noise protection foam
- can be processed at ambient temperatures above 3°C
- skin forming time: approx. 8 to 12 minutes
- cuttable after approx. 25 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 65 liters free foamed per 850 ml can

Item number	Order designation	Content
108-600	Volumenschaum 65 850 ml	850 ml can
108-901	Profi Volumenschaum 65 850 ml*	850 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

*only for professional users - will be delivered without gloves



Pistolenschaum Tempo

fast curing gun foam

- very fast reacting gun foam
- tested as noise protection foam by the TU Graz; Joint sound insulation: 58 dB
- dimensionally stable and pressure-free after curing
- skin forming time: approx. 5 to 7 minutes
- cuttable after approx. 15 to 20 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 48 liters free foamed per 750 ml can

Item number	Order designation	Content
108-060	Pistolenschaum Tempo 750 ml	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet



Pistolenschaum Basic

standard gun foam for filling and insulating

- 1-component PU foam with good adhesion to conventional building substrates such as concrete, masonry, wood, polystyrene, chipboard, insulating materials, metals and many plastics
- dimensionally stable and pressurefree after curing
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 25 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 12 months
- color: yellow
- yield: 40 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-002	Pistolenschaum Basic 750 ml	750 ml can
108-930	Profi Pistolenschaum Basic 750 ml*	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

*only for professional users - will be delivered without gloves



All Seasons Pistolenschaum

winter gun foam processable from -5 °C ambient temperature

- year-round applicable 1-component PU foam
- top product for applications at low temperatures
- at higher ambient temperatures identical properties as „normal“ gun foam
- tested as noise protection foam by the ift Rosenheim; Joint sound insulation: 63 dB (for 10 and 20 mm joints)
- normally flammable according to EN 13501-1
- skin forming time: approx. 6 to 8 minutes
- cuttable after approx. 20 to 30 minutes
- very low emission – EMICODE EC1^{PLUS}
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- Class A+ according to French VOC emissions regulations
- color: yellow
- yield: 30 liters free foamed per 500 ml can
- yield: 44 liters free foamed per 750 ml can

Item number	Order designation	Content
108-007	All Seasons Pistolenschaum 500 ml	500 ml can
108-952	Profi All Seasons Pistolenschaum 500 ml*	500 ml can
108-010	All Seasons Pistolenschaum 500 ml with PDR	500 ml can
108-953	Profi All Seasons Pistolenschaum 500 ml with PDR*	500 ml can
108-033	All Seasons Pistolenschaum 750 ml	750 ml can
108-933	Profi All Seasons Pistolenschaum 750 ml*	750 ml can
108-020	All Seasons Pistolenschaum 750 ml with PDR	750 ml can
108-951	Profi All Seasons Pistolenschaum 750 ml with PDR*	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

**only for professional users - will be delivered without gloves*

Winter-Pistolenschaum

winter gun foam processable from -12 °C ambient temperature

- top product for applications at low temperatures
- best foam quality even at lowest temperatures
- at higher ambient temperatures identical properties as „normal“ gun foam
- fine-pored foam structure
- cuttable after approx. 35 to 45 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 36 liters free foamed per 750 ml can

Item number	Order designation	Content
108-014	Winter-Pistolenschaum 750 ml	750 ml can
108-959	Profi Winter-Pistolenschaum 750 ml *	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

**only for professional users - will be delivered without gloves*



Pistolenschaum Mega

1-component PU foam with excellent adhesion to conventional building substrates

- particularly high yield
- normally flammable – B2 according to DIN 4102
- tested as noise protection foam
- skin forming time: approx. 6 minutes
- cuttable after approx. 15 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 40 liters free-foamed per 500ml can
- yield: 58 liters free-foamed per 750ml can
- yield: 65 liters free-foamed per 850ml can

Item number	Order designation	Content
108-034	Pistolenschaum Mega40 500 ml with PDR	500 ml can
108-971	Profi Pistolenschaum Mega40 500 ml with PDR*	500 ml can
108-035	Pistolenschaum Mega58 with 750 ml PDR	750 ml can
108-972	Profi Pistolenschaum Mega58 750 ml with PDR*	750 ml can
108-036	Pistolenschaum Mega65 850 ml with PDR	850 ml can
108-973	Profi Pistolenschaum Mega65 850 ml with PDR*	850 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

**only for professional users - will be delivered without gloves*

Pistolenschaum B2

gun foam tested according to DIN 4102

- 1-component PU foam with excellent adhesion to construction substrates
- normally flammable – B2 according to DIN 4102
- tested as noise protection foam; joint sound insulation: 62 dB
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 20 to 30 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 40 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-935	Profi Pistolenschaum B2 500 ml with PDR*	500 ml can
108-004	Pistolenschaum B2 750 ml with PDR	750 ml can
108-904	Profi Pistolenschaum B2 750 ml with PDR*	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

**only for professional users - will be delivered without gloves*



Weichzellschaum

airtight and highly elastic gun foam

- for the insulation of interior roof constructions and for filling cavities and wall openings
- a high degree of elongation and compression capability allows for greater joint movement
- movement capability +/-20 % according to EN 17333-4
- very good adhesion on conventional building substrates such as masonry, concrete and wood on insulation materials, metals and many plastics
- excellent adhesion on wood, fiber cement, aerated concrete, concrete, masonry, plaster, XPS and rigid PVC
- tested as noise protection foam by the ift Rosenheim;
- joint sound insulation: 63 dB
- excellent thermal insulation; thermal conductivity: $\lambda = 0,0365 \text{ W/mK}$ according to EN 12667
- system tested according to ÖNORM B 5320
- airtight: up to 600 Pa
- tested vapor diffusion behavior
- high elasticity
- skin forming time: approx. 8 to 12 minutes
- cuttable after approx. 15 to 20 minutes
- very low emission – EMICODE EC1^{PLUS}
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: white
- yield: 38 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-317	Weichzellschaum 750 ml	750 ml can
108-921	Profi Weichzellschaum 750 ml*	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		

**only for professional users - will be delivered without gloves*



Weichzellschaum B2

highly elastic and normally flammable according to EN 13501

- for the insulation of interior roof constructions and for filling cavities and wall openings
- a high degree of elongation and compression capability allows for greater joint movement
- movement capability +/-15 % according to EN 17333-4
- very good adhesion on conventional building substrates such as masonry, concrete and wood on insulation materials, metals and many plastics
- excellent adhesion on wood, fiber cement, aerated concrete, concrete, masonry, plaster, XPS and rigid PVC
- normally flammable according to EN 13501
- high elasticity
- skin forming time: approx. 6 to 8 minutes
- cuttable after approx. 15 to 20 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: white
- yield: 32 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-320	Weichzellschaum B2 750 ml	750 ml can
108-942	Profi Weichzellschaum B2 750 ml*	750 ml can
108-321	Weichzellschaum B2 750 ml with PDR	750 ml can
108-947	Profi Weichzellschaum B2 750 ml with PDR*	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		

**only for professional users - will be delivered without gloves*



Pistolen-Brunnenschaum

mounting of concrete shaft- and well rings

- processing with dispensing gun
- special foam for installing shaft- and well rings
- tested for water resistance
- resistant to gasoline, oil and water
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 20 to 25 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: blue
- yield: 48 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-073	Pistolen-Brunnenschaum 750 ml	750 ml can
108-939	Profi Pistolen-Brunnenschaum 750 ml*	750 ml can
108-097	Pistolen Brunnenschaum 750 ml with PDR	750 ml can
108-974	Profi Pistolen Brunnenschaum 750 ml with PDR*	750 ml can

Packing unit: 12 cans/box, 56 boxes/pallet

**only for professional users - will be delivered without gloves*



Pistolen-Brandschutzschaum

flame retardant according to EN 13501 and DIN 4102

- excellent adhesion to conventional building substrates such as concrete, masonry, wood, polystyrene, chipboard, insulation materials, metals and many plastics
- for filling joints, cavities and wall openings
- observe the regulations of the fire protection element manufacturers
- flame retardant – B - s1, d0 according to EN 13501-1
- flame retardant – B1 according to EN 4102-1
- „non-burning droplets“ according to DIN 4102-16
- „allgemein bauaufsichtliches Prüfzeugnis abP“ (general test certificate issued by an approved building inspectorate) for Germany issued by the MPA Hannover
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 30 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 40 liters free-foamed per 750 ml can

Item number	Order designation	Content
107-200	Pistolen-Brandschutzschaum 750 ml	750 ml can
107-201	Pistolen-Brandschutzschaum 750 ml with PDR	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		



Dämmplattenkleber

PU foam adhesive for bonding polystyrene insulation boards

- gun foam for easy fixation of the perimeter insulation
- excellent adhesion on many building substrates
- tested for compatibility with bituminous coatings (PMBC – Polymer Modified Bituminous Coatings)
- high yield – fast-curing
- easy and fast processing
- no preparation time required
- fine-pored cell structure – dimensionally stable
- one can is enough for about 12 to 15 m²
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: yellow
- yield: 47 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-318	Dämmplattenkleber 750 ml	750 ml can
108-903	Profi Dämmplattenkleber 750 ml*	750 ml can
108-355	Dämmplattenkleber 750 ml with PDR	750 ml can
108-975	Profi Dämmplattenkleber 750 ml with PDR*	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		

*only for professional users - will be delivered without gloves



Perimeter insulation – step by step



1. Apply foam in strips at intervals of approx. 25 to 30 cm.
2. Press on the insulation board and rub it so the glue can distribute well.
3. Align and support the lowest row of insulation boards and after a few minutes, the second row can already be set up.

Fugendichtschäum

foam sealant for rainproof connections in the facade area

- for connection joints in facades, roof windows, partition walls, HVAC (heating/ventilating/air conditioning) systems, etc.
- high adhesive strength on most common building substrates such as masonry, concrete, wood, insulation materials, metals, and many plastics.
- dimensionally stable and dwell-pressure free after curing
- skin forming time: approx. 6 to 8 minutes
- non-sticky after approx. 15 to 20 minutes
- normally flammable according to EN 13501
- driving rain tightness: Joint width 15 mm to 39 mm: 450 Pa Joint width from 40 mm: 600 Pa
- water vapor permeability: $\mu = 12.4$ according to EN 12572
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: blue
- yield: 35 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-037	Fugendichtschäum 750 ml	Dose 750 ml
108-976	Profi Fugendichtschäum 750 ml*	Dose 750 ml
Packing unit: 12 cans/box, 56 boxes/pallet		

*nur für gewerbliche Anwender – wird ohne Handschuhe geliefert

NEW
PRODUCT



B1 Füllschaum

fine-pored B1 PU foam – hardly inflammable

- for filling narrow joints according to ÖNORM B 6400 in ETICS
- flame retardant gun foam with excellent adhesion to common construction substrates such as concrete, masonry, plaster, wood, chipboard, insulation materials, metals and many plastics
- for filling joints, cavities and wall openings
- flame retardant – B1 according to DIN 4102-1
- dimensionally stable and pressure-free after curing
- skin forming time: approx. 8 to 12 minutes
- cuttable after approx. 30 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: yellow
- yield: 40 liters free-foamed per 750 ml can

Item number	Order designation	Content
107-221	B1 Füllschaum 750 ml	750 ml can
107-921	Profi B1 Füllschaum 750 ml*	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		

*only for professional users - will be delivered without gloves



Klebeschaum DS

certified adhesive foam for ETICS applications

- particularly suitable as an adhesive for perimeter insulation boards
- can only be used within the scope of an ETICS certification in areas requiring approval
- excellent adhesion to conventional building substrates such as concrete, masonry, plaster, wood, chipboard, insulation materials, metals and many plastics
- tested according to TR 46 for technical evaluation for ETICS according to ETAG 004
- „non-burning droplets“ according to DIN 4102-16
- flame retardant – B1 according to DIN 4102-1
- dimensionally stable and dwell-pressure free after curing
- skin forming time: approx. 6 minutes
- non-sticky after approx. 15 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 40 liters free-foamed per 750 ml can

Item number	Order designation	Content
108-316	Klebeschaum DS 750 ml	750 ml can
108-342	Klebeschaum DS 750 ml with PDR	750 ml can
Packing unit: 12 cans/box, 56 boxes/pallet		



2K Schaum

high resistance and dimensional stability

- 2-component PU foam with high compressive strength
- particular suitability for mounting door frames and window sills
- for filling joints and cavities where it is not possible to supply moisture, such as in boat construction, shower trays, in metal construction, etc.
- high adhesion to most building substrates such as masonry, concrete, wood, insulation materials, metals and many plastics
- excellent adhesion on wood, fiber cement, aerated concrete, concrete, masonry, plaster, XPS and hard PVC
- reacts without adding moisture
- processing time: approx. 8 minutes
- tested as noise protection foam by the Technical University of Graz; joint sound insulation: 61 dB
- dimensionally stable and pressure-free after curing
- cuttable after approx. 20 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: green
- yield: 13 liters free-foamed per 440 ml can
- yield: 18 liters free-foamed per 600 ml can

Item number	Order designation	Content
109-001	2K Schaum 440 ml	440 ml can
109-900	Profi 2K Schaum 440 ml*	440 ml can
109-011	2K Schaum 600 ml	600 ml can
109-911	Profi 2K Schaum 600 ml*	600 ml can


Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*

Door frame installation – step by step *




1. Set up the frame and brace it.

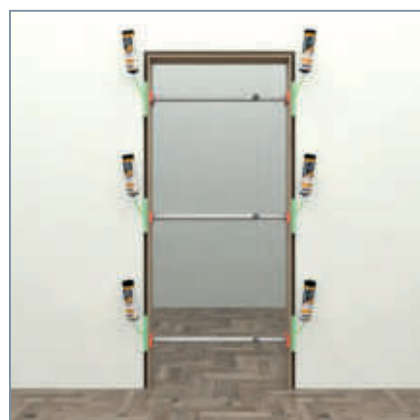

2. Foam with 2-component PU foam.



3. After curing, despread and cut off the surplus PU foam.

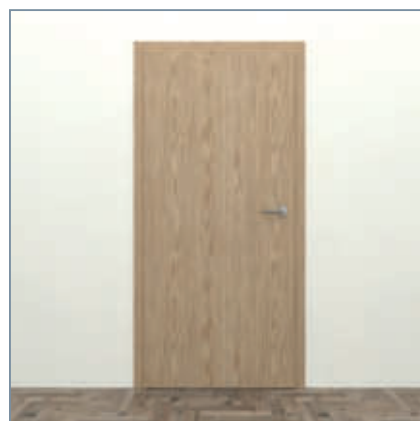

4. Attach the panel and hinge the door leaf.

*Observe ÖNORM B 5335 and the installation instruction of the door frame manufacturer.



2K Tempo

fast, low-emission 2-component foam

- fast-curing, 2-component PU foam
- for fast mounting of door frames and windowsills
- cuttable after 15 minutes, despreadable after 30 minutes and fully loadable after 90 minutes
- significantly higher strength compared to 1-component PU foams
- reacts without adding moisture
- very low emission
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: green
- yield: 12 liters free-foamed per 400 ml can

Item number	Order designation	Content
110-005	2K Tempo 400 ml	400 ml can
110-900	Profi 2K Tempo 400 ml*	400 ml can

Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*

2K Turbo

fast-curing, low emission 2-component foam with fire class E

- fast-curing, 2-component PU foam
- for fast mounting of door frames and windowsills
- cuttable after 15 minutes, despreadable after 30 minutes and fully loadable after 90 minutes
- significantly higher strength compared to 1-component PU foams
- normally flammable according to EN 13501
- reacts without adding moisture
- very low emission
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: green
- yield: 12 liters free-foamed per 400 ml can

Item number	Order designation	Content
110-001	2K Turbo 400 ml	400 ml can
110-903	Profi 2K Turbo 400 ml*	400 ml can
110-010	2K Turbo 400 ml with PDR	400 ml can
110-901	Profi 2K Turbo 400 ml with PDR*	400 ml can

Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*

2K Rapidschaum

high strength propellant-free cartridge foam

- 2-component cartridge foam for the application of door frames, filling gaps and assembling prefabricated components
- fast curing – cuttable after 5-10 minutes
- reaches final strength after approx. 20 minutes
- high adhesion
- normally flammable – B2 according to DIN 4102
- easy processing with Doppelpresse FX7-21 DP
- propellant-free
- color: yellow

Item number	Order designation	Content
109-050	2K Rapidschaum	210 ml cartridge
640-005	Doppelpresse FX7-21 DP	

Packing unit: 16 cans/box

**only for professional users - will be delivered without gloves*



Montage- und Füllschaum

the universal PU straw foam for do-it-yourselfers and craftsmen

- 1-component PU foam with excellent adhesion to common construction substrates, such as concrete, masonry, wood, polystyrene, chipboard, insulating materials, metals and many plastics
- for filling cavities in ceilings, walls and floors; for filling joints, e.g. between window or door frames and masonry; for filling conduit slits, wall openings and much more
- tested as noise protection foam by the ift Rosenheim; Joint sound insulation: 62 dB
- dimensionally stable and dwell-pressure free after curing
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 30 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: yellow
- yield: 23 liters free-foamed per 500 ml can
- yield: 27 liters free-foamed per 600 ml can
- yield: 34 liters free-foamed per 750 ml can

Item number	Order designation	Content
101-001	Montage- und Füllschaum 500 ml	500 ml can
101-003	Montage- und Füllschaum 600 ml	600 ml can
101-005	Montage- und Füllschaum 750 ml	750 ml can
101-900	Profi Montage- und Füllschaum 750 ml*	750 ml can

Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*

All Seasons Montageschaum

winter straw foam processable from -10 °C ambient temperature

- year-round applicable 1-component PU foam
- top product for low temperature processing
- Workable from 0 °C can temperature
- perfect PU foam solution for the winter
- Ideal foaming characteristics - optimum stability
- at higher temperatures identical properties as „normal“ straw foam
- skin forming time: approx. 8 to 14 minutes
- cuttable after approx. 40 to 60 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 32 liters free-foamed per 750 ml can

Item number	Order designation	Content
101-101	All Seasons Montageschaum 750 ml	750 ml can
101-902	Profi All Seasons Montageschaum 750 ml*	750 ml can

Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*



Montageschaum B2

the universal PU foam tested according to DIN 4102

- same application and properties as Montage- und Füllschaum
- normally flammable – B2 according to DIN 4102
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 23 liters free-foamed per 500 ml can
- yield: 34 liters free-foamed per 750 ml can

Item number	Order designation	Content
101-004	Montageschaum B2 500 ml with PDR	500 ml can
101-006	Montageschaum B2 750 ml with PDR	750 ml can
101-905	Profi Montageschaum B2 750 ml with PDR*	750 ml can

Packing unit: 12 cans/box, 48 boxes/pallet

**only for professional users - will be delivered without gloves*



Profi Montageschaum Basic

one-component PU foam

- 1-component PU foam with good adhesion to common building substrates such as brick, wood, plaster, stone, many insulation materials and various plastics
- dimensionally stable and pressure free after curing
- skin formation time: approx. 8 to 10 minutes
- cuttable after approx. 30 minutes
- environmentally friendly propellants (free of CFCs, HCFCs, and HFCs)
- color: yellow
- yield: 32 litres free foamed per 750 ml can

Item number	Order designation	Content
101-930	Profi Montageschaum Basic*	750 ml can

Packing unit: 12 cans/box, 70 boxes/pallet

**only for professional users - will be delivered without gloves*

Fensterschaum

fine-pored PU foam for window installations

- special product for window installations
- easy processing with the foam adapter and yet best foam quality
- 1-component PU foam with excellent adhesion to conventional construction substrates
- high adhesive strength and fast curing
- excellent thermal and acoustic insulation
- skin forming time: approx. 5 to 7 minutes
- cuttable after approx. 25 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: blue
- yield: 36 liters free-foamed per 750 ml can

Item number	Order designation	Content
105-001	Fensterschaum 750 ml	750 ml can

Packing unit: 12 cans/box, 48 boxes/pallet



Montage-Brandschutzschaum

flame retardant according to EN 13501 and DIN 4102

- excellent adhesion to conventional construction substrates such as concrete, masonry, wood, polystyrene, chipboard, insulating materials, metals and many plastics
- for filling joints, cavities and wall openings
- observe the specifications of the fire protection element manufacturer
- flame retardant – B - s1, d0 according to EN 13501-1
- flame retardant – B1 according to DIN 4102-1
- „non-burning droplets“ according to DIN 4102-16
- skin forming time: approx. 8 to 10 minutes
- cuttable after approx. 35 minutes
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- color: yellow
- yield: 32 liters free-foamed per 750 ml can

Item number	Order designation	Content
107-050	Montage-Brandschutzschaum 750 ml	750 ml can
Packing unit: 6 cans/box, 96 boxes/pallet		



Brunnenschaum

resistant to water and sewer fluids

- special product for installing shaft- and well rings made of concrete
- resistant to diluted chemicals and mineral oils as well as to water
- climate-friendly propellants (free of CFCs, HCFCs and HFCs)
- shelf life: 15 months
- color: blue
- yield: 36 liters free-foamed per 750 ml can

Item number	Order designation	Content
106-001	Brunnenschaum 750 ml DE-SL-PL	750 ml can
106-003	Brunnenschaum 750 ml DE-SL-PL with PDR	750 ml can
106-900	Profi Brunnenschaum 750 ml DE-SL-PL*	750 ml can
106-903	Profi Brunnenschaum 750 ml DE-SL-PL with PDR*	750 ml can
Packing unit: 12 cans/box, 48 boxes/pallet		

*only for professional users - will be delivered without gloves



PU-Schaumadapter 5 Stk. SB-Packung

replacement tubes for all INSEBO® straw foams

- suitable for INSEBO® straw foams and INSEBO® 2K foams
- 5 pieces per pack
- flexible tube

Item number	Order designation
113-033	PU-Schaumadapter 5 Stk. SB-Packung



PU-Universal-Reiniger

highly effective solvent mixture

- cleaner for removing fresh PU foam inside PU foam guns
- can be used by the spray head as a PU foam cleaner for fresh, not yet cured PU foam
- practical universal cleaner with very good cleaning effect
- with attachable spray head for cleaning soiled surfaces and tools
- highly effective solvent mixture
- shelf life: 18 months

Item number	Order designation	Content
112-015	PU-Universal-Reiniger 500 ml	500 ml spray can
Packing unit: 12 spray cans/box, 84 boxes/pallet		



PRODUCT OVERVIEW

JOINT SEALING TAPES

The life long tapes for windows and doors: our joint sealing tapes equip you in the fight against noise, wind and weather.

For windows, facade insulations and other construction joints: pre-compressed joint sealing tapes and foil tapes complete our sealing system, which can withstand the highest demands.

- 50 Hannoband BG1
- 51 Hannoband BG1-M
- 52 Hannoband 600
- 53 Hannoband BG2
- 54 Hannoband THERM
- 55 Hannoband 3E Basic
- 56 Vorlegeband
- 57 Vorlegeband Extra
- 58 Folienband DUO Easy 240
- 59 Folienband FA Easy Soft 240
- 59 Folienband FI Easy 240
- 60 Anschlussflansch **NEW!**
- 61 Flanschdicht **NEW!**
- 61 Folienprimer

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website (insebo.com).

Hannoband BG1

high quality sound insulation and weather protection

Hannoband BG1 is ideally suited for directly and indirectly weathered joints in window construction, in facade areas and in timber construction. The long-lasting recovery properties ensure a permanently tight joint.

- meets the requirements of DIN 18542 (BG1) and ÖNORM B 5320
- driving rain tightness: ≥ 600 Pa
- airtight: $a_n < 1.0$
- vapor-permeable: s_d value ≤ 0.5 m
- joint sound insulation: up to 59 dB
- excellent thermal insulation; thermal conductivity: $\lambda = 0,0412$ W/mK
- flame retardant – B1 according to DIN 4102
- tested for compatibility with adjoining building materials
- temperature resistant from -30 °C to +100 °C, for a short time even up to +130 °C
- long-term weather-resistant: natural weathering > 15 years
- UV-resistant
- storage stability: 24 months
- very low emission – EMI CODE EC1^{PLUS}



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
414-001	BG1 10/1,5-2,5	10 mm	1,5-2,5 mm	12 rm	30	360 rm
414-002	BG1 15/1,5-2,5	15 mm	1,5-2,5 mm	12 rm	20	240 rm
414-003	BG1 20/1,5-2,5	20 mm	1,5-2,5 mm	12 rm	15	180 rm
414-004	BG1 10/2-4	10 mm	2-4 mm	10 rm	30	300 rm
414-005	BG1 15/2-4	15 mm	2-4 mm	10 rm	20	200 rm
414-006	BG1 20/2-4	20 mm	2-4 mm	10 rm	15	150 rm
414-007	BG1 10/3-7	10 mm	3-7 mm	7,5 rm	30	225 rm
414-025	BG1 12/3-7	12 mm	3-7 mm	7,5 rm	25	187,5 rm
414-008	BG1 15/3-7	15 mm	3-7 mm	7,5 rm	20	150 rm
414-009	BG1 20/3-7	20 mm	3-7 mm	7,5 rm	15	112,5 rm
414-027	BG1 10/5-10	10 mm	5-10 mm	5 rm	30	150 rm
414-010	BG1 15/5-10	15 mm	5-10 mm	5 rm	20	100 rm
414-011	BG1 20/5-10	20 mm	5-10 mm	5 rm	15	75 rm
414-012	BG1 30/5-10	30 mm	5-10 mm	5 rm	10	50 rm
414-013	BG1 15/7-12	15 mm	7-12 mm	4,3 rm	20	86 rm
414-014	BG1 20/7-12	20 mm	7-12 mm	4,3 rm	15	64,5 rm
414-015	BG1 25/7-12	25 mm	7-12 mm	4,3 rm	12	51,6 rm
414-016	BG1 30/7-12	30 mm	7-12 mm	4,3 rm	10	43 rm
414-017	BG1 20/8-15	20 mm	8-15 mm	3 rm	15	45 rm
414-018	BG1 25/8-15*	25 mm	8-15 mm	3 rm	12	36 rm
414-019	BG1 30/8-15*	30 mm	8-15 mm	3 rm	10	30 rm
414-098	BG1 20/10-18	20 mm	10-18 mm	5 rm	15	75 rm
414-020	BG1 25/10-18	25 mm	10-18 mm	5 rm	12	60 rm
414-410	BG1 SB 15/3-7**	15 mm	3-7 mm	7,5 rm	7	52,5 rm
414-411	BG1 SB 15/5-10**	15 mm	5-10 mm	5 rm	7	35 rm
414-412	BG1 SB 15/7-12**	15 mm	7-12 mm	4,3 rm	7	30,1 rm
414-413	BG1 SB 20/8-15**	20 mm	8-15 mm	3 rm	5	15 rm

Delivery times and other dimensions on request

*Minimum order quantity: 12 boxes or a multiple of this quantity

**These articles are available separately packed and individually labeled

Hannoband BG1-M

highest weather protection and joint tolerance

Hannoband BG1-M completes the product range of Hannoband BG1 for particularly wide joints.

- meets the requirements of DIN 18542 (BG1) and ÖNORM B 5320
- established membrane technology allows higher joint tolerances than conventional sealing tapes
- ideally suited for directly and indirectly weathered joints in window construction, facade and timber constructions
- permanently tight connection thanks to long-lasting recovery properties
- driving rain tightness: ≥ 600 Pa
- airtight: $a_n < 1.0$
- vapor-permeable: s_d value ≤ 0.5 m
- excellent thermal insulation; thermal conductivity: $\lambda = 0,0429$ W/mK
- flame retardant – B1 according to DIN 4102-1
- very low emission – EMI CODE EC1^{PLUS}



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
414-442	BG1-M 25 /8-18	25 mm	8-18 mm	4,7 rm	12	56,4 rm
414-441	BG1-M 25/12-25	25 mm	12-25 mm	4,7 rm	12	56,4 rm
414-440	BG1-M 35/20-35	35 mm	20-35 mm	4,7 rm	8	37,6 rm

Delivery times and other dimensions on request

Minimum order quantity: 12 boxes or a multiple of this quantity

Hannoband 600

weather protection for window and facade joints

Hannoband 600 meets the requirements for pre-compressed joint sealing tapes, both for window installation as well as for facade insulation.

- meets the requirements of DIN 18542 (BG1) and ÖNORM B 5320
- driving rain tightness: ≥ 600 Pa
- airtight: $a_n < 1.0$
- vapor-permeable: s_d value ≤ 0.5 m
- excellent thermal insulation; thermal conductivity: $\lambda = 0.0412$ W / mK
- flame retardant – B1 according to DIN 4102
- temperature resistant: from -30 °C to + 100 °C
- long-term weather-resistant
- UV-resistant
- very low emission – EMI CODE EC1^{PLUS}



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
414-666	600 10/1,5-2,5	10 mm	1,5-2,5 mm	12 rm	30	360 rm
414-668	600 15/1,5-2,5	15 mm	1,5-2,5 mm	12 rm	20	240 rm
414-669	600 20/1,5-2,5	20 mm	1,5-2,5 mm	12 rm	15	180 rm
414-660	600 10/2-4	10 mm	2-4 mm	12 rm	30	360 rm
414-661	600 15/2-4	15 mm	2-4 mm	12 rm	20	240 rm
414-671	600 20/2-4	20 mm	2-4 mm	12 rm	15	180 rm
414-670	600 10/3-7	10 mm	3-7 mm	7,5 rm	30	225 rm
414-662	600 15/3-7	15 mm	3-7 mm	7,5 rm	20	150 rm
414-664	600 20/3-7	20 mm	3-7 mm	7,5 rm	15	112,5 rm
414-667	600 15/4-9	15 mm	4-9 mm	7,5 rm	20	150 rm
414-672	600 20/4-9	20 mm	4-9 mm	7,5 rm	15	112,5 rm
414-673	600 30/4-9	30 mm	4-9 mm	7,5 rm	10	75 rm
414-663	600 15/5-12	15 mm	5-12 mm	5 rm	20	100 rm
414-665	600 20/5-12	20 mm	5-12 mm	5 rm	15	75 rm
414-674	600 30/5-12	30 mm	5-12 mm	5 rm	10	50 rm
414-675	600 20/7-15	20 mm	7-15 mm	4,3 rm	15	64,5 rm
414-676	600 25/7-15	25 mm	7-15 mm	4,3 rm	12	51,6 rm
414-677	600 30/7-15	30 mm	7-15 mm	4,3 rm	10	43 rm
414-681	600 20/8-20	20 mm	8-20 mm	3 rm	15	45 rm
414-678	600 25/8-20	25 mm	8-20 mm	3 rm	12	36 rm
414-679	600 30/8-20	30 mm	8-20 mm	3 rm	10	30 rm

Other dimensions on request

Hannoband BG2

for outdoor applications on concealed joints

Hannoband BG2 meets all requirements for concealed pre-compressed joint sealing tapes both for window installation as well as for facade sealing and other (construction) connection joints.

- meets the requirements of DIN 18542 (BG2) and ÖNORM B 5320
- driving rain tightness: ≥ 300 Pa, many other dimensions up to 600 Pa
- airtight: $a_n < 1.0$
- vapor-permeable: s_d value: ≤ 0.5 m
- excellent thermal insulation; thermal conductivity: $\lambda = 0,0396$ W/mK
- normally flammable according to EN 13501
- compatible with conventional building materials
- storage stability: 24 months
- very low emission – EMI CODE EC1^{PLUS}



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
413-027	BG2 9/1	9 mm	1 mm	10 rm	33	330 rm
413-030	BG2 10/1,5-2,5	10 mm	1,5-2,5 mm	18 rm	30	540 rm
413-038	BG2 15/1,5-2,5	15 mm	1,5-2,5 mm	18 rm	20	360 rm
413-072	BG2 20/1,5-2,5	20 mm	1,5-2,5 mm	18 rm	15	270 rm
413-028	BG2 10/2-4	10 mm	2-4 mm	12 rm	30	360 rm
413-034	BG2 15/2-4	15 mm	2-4 mm	12 rm	20	240 rm
413-033	BG2 20/2-4	20 mm	2-4 mm	12 rm	15	180 rm
413-044	BG2 15/3-7	15 mm	3-7 mm	6 rm	20	120 rm
413-046	BG2 20/3-7	20 mm	3-7 mm	6 rm	15	90 rm
413-010	BG2 15/5-9	15 mm	5-9 mm	5 rm	20	100 rm
413-011	BG2 20/5-9	20 mm	5-9 mm	5 rm	15	75 rm
413-012	BG2 30/5-9	30 mm	5-9 mm	5 rm	10	50 rm
413-058	BG2 15/7-12	15 mm	7-12 mm	5 rm	20	100 rm
413-059	BG2 20/7-12	20 mm	7-12 mm	5 rm	15	75 rm
413-062	BG2 25/7-12	25 mm	7-12 mm	5 rm	12	60 rm
413-064	BG2 30/7-12	30 mm	7-12 mm	5 rm	10	50 rm
413-066	BG2 20/8-15	20 mm	8-15 mm	4 rm	15	60 rm
413-067	BG2 25/8-15	25 mm	8-15 mm	4 rm	12	48 rm
413-069	BG2 30/8-15	30 mm	8-15 mm	4 rm	10	40 rm

Other dimensions on request

Hannoband THERM

excellent heat and sound insulation from the roll

Hannoband THERM insulates reliably and long-term and provides optimum thermal and sound insulation at lift-and-slide doors and roller shutters, as well as where PU can foams should be avoided, for example, for ecological reasons. Complements perfectly with INSEBO® sealants, foil tapes or Hannoband BG1 and BG2.

- the first choice where PU foams or propellants should be avoided
- Ideal for pressure-free sound and heat insulation
- excellent joint sound insulation: $R_{s,w}$ up to 62 dB*
- excellent thermal insulation; thermal conductivity: $\lambda=0.0396$ W/mK
- normally flammable according to EN 13501
- very low emission – EMICODE EC1^{PLUS}

*70/5-24 was tested with outer and inner foil tape in a 10 mm joint



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
412-060	THERM 56/2-8	56 mm	2-8 mm	18 rm	5	90 rm
412-061	THERM 66/2-8	66 mm	2-8 mm	18 rm	4	72 rm
412-062	THERM 76/2-8	76 mm	2-8 mm	18 rm	3	54 rm
412-063	THERM 100/2-8	100 mm	2-8 mm	18 rm	3	54 rm
412-064	THERM 150/2-8	150 mm	2-8 mm	18 rm	2	36 rm
412-065	THERM 200/2-8	200 mm	2-8 mm	18 rm	1	18 rm
412-066	THERM 56/5-24	56 mm	5-24 mm	6 rm	5	30 rm
412-067	THERM 66/5-24	66 mm	5-24 mm	6 rm	4	24 rm
412-068	THERM 76/5-24	76 mm	5-24 mm	6 rm	3	18 rm
412-080	THERM 86/5-24	86 mm	5-24 mm	6 rm	3	18 rm
412-069	THERM 100/5-24	100 mm	5-24 mm	6 rm	3	18 rm
412-070	THERM 150/5-24	150 mm	5-24 mm	6 rm	2	12 rm
412-071	THERM 200/5-24	200 mm	5-24 mm	6 rm	1	6 rm
412-072	THERM 56/8-40	56 mm	8-40 mm	5 rm	5	25 rm
412-073	THERM 66/8-40	66 mm	8-40 mm	5 rm	4	20 rm
412-074	THERM 76/8-40	76 mm	8-40 mm	5 rm	3	15 rm
412-078	THERM 86/8-40	86 mm	8-40 mm	5 rm	3	15 rm
412-075	THERM 100/8-40	100 mm	8-40 mm	5 rm	3	15 rm
412-076	THERM 150/8-40	150 mm	8-40 mm	5 rm	2	10 rm
412-079	THERM 175/8-40	175 mm	8-40 mm	5 rm	1	5 rm
412-077	THERM 200/8-40	200 mm	8-40 mm	5 rm	1	5 rm
412-081	THERM 56/9-50	56 mm	9-50 mm	4 rm	5	20 rm
412-082	THERM 66/9-50	66 mm	9-50 mm	4 rm	4	16 rm
412-083	THERM 76/9-50	76 mm	9-50 mm	4 rm	3	12 rm
412-084	THERM 86/9-50	86 mm	9-50 mm	4 rm	3	12 rm
412-085	THERM 100/9-50	100 mm	9-50 mm	4 rm	3	12 rm
412-086	THERM 150/9-50	150 mm	9-50 mm	4 rm	2	8 rm
412-087	THERM 175/9-50	175 mm	9-50 mm	4 rm	1	4 rm
412-088	THERM 200/9-50	200 mm	9-50 mm	4 rm	1	4 rm

Other dimensions on request

Hannoband 3E Basic

multifunctional tape for window connections

Hannoband 3E Basic is a pre-compressed and impregnated multifunctional joint sealing tape with at least one functional membrane. The different tape widths and thicknesses enable a great variety of Joint widths and window profile thicknesses to be sealed. Hannoband 3E Basic is used for sealing the functional areas of the window connection and is designed for covered applications.

- complies with DIN 18542 (MF2) and ÖNORM B 5320
- meets the requirements for the air-tight and impact rain proof sealing
- ideally suited for standard-compliant window installation: heat and sound-proofed and also airtight and impact rain proof
- driving rain tightness: ≥ 600 Pa
- airtight: $a_n < 0.1$
- joint sound insulation: $R_{s,w}$ 57 dB
- excellent thermal insulation; thermal conductivity: $\lambda \leq 0.0386$ W/mK
- normally flammable according to EN 13501
- very low emission – EMICODE EC1^{PLUS}



Item no.	Order designation	Joint depth	Joint width	Roll length	Rolls per box	Box content
417-060	3E Basic 56/4-9 mm*	56 mm	4-9 mm	18,8 rm	5	94,0 rm
417-061	3E Basic 56/6-15 mm*	56 mm	6-15 mm	14,1 rm	5	70,5 rm
417-062	3E Basic 56/10-20 mm*	56 mm	10-20 mm	11,7 rm	5	58,5 rm
417-063	3E Basic 56/15-30 mm*	56 mm	15-30 mm	9,4 rm	5	47,0 rm
417-064	3E Basic 64/4-9 mm	64 mm	4-9 mm	18,8 rm	4	75,2 rm
417-065	3E Basic 64/6-15 mm	64 mm	6-15 mm	14,1 rm	4	56,4 rm
417-066	3E Basic 64/10-20 mm	64 mm	10-20 mm	11,7 rm	4	46,8 rm
417-067	3E Basic 64/15-30 mm	64 mm	15-30 mm	9,4 rm	4	37,6 rm
417-068	3E Basic 74/4-9 mm*	74 mm	4-9 mm	18,8 rm	4	75,2 rm
417-069	3E Basic 74/6-15 mm*	74 mm	6-15 mm	14,1 rm	4	56,4 rm
417-070	3E Basic 74/10-20 mm	74 mm	10-20 mm	11,7 rm	4	46,8 rm
417-071	3E Basic 74/15-30 mm	74 mm	15-30 mm	9,4 rm	4	37,6 rm
417-072	3E Basic 84/4-9 mm*	84 mm	4-9 mm	18,8 rm	3	56,4 rm
417-073	3E Basic 84/6-15 mm	84 mm	6-15 mm	14,1 rm	3	42,3 rm
417-074	3E Basic 84/10-20 mm	84 mm	10-20 mm	11,7 rm	3	35,1 rm
417-075	3E Basic 84/15-30 mm	84 mm	15-30 mm	9,4 rm	3	28,2 rm
417-076	3E Basic 94/4-9 mm*	94 mm	4-9 mm	18,8 rm	3	56,4 rm
417-077	3E Basic 94/6-15 mm*	94 mm	6-15 mm	14,1 rm	3	42,3 rm
417-078	3E Basic 94/10-20 mm*	94 mm	10-20 mm	11,7 rm	3	35,1 rm
417-079	3E Basic 94/15-30 mm*	94 mm	15-30 mm	9,4 rm	3	28,2 rm


*Minimum order quantity: 12 boxes or a multiple of this quantity

Vorlegeband

PE sealing tape, adhesive layer covered with foil

- foamed, closed-cell, plasticizer-free glazing tape
- sealing of windows and doors, thermal and acoustic decoupling of components, e.g. drywall walls, sealing air ducts in air conditioning and ventilation
- one-sided self-adhesive
- adhesive surface remains protected by the PE film until processing
- excellent thermal insulation; thermal conductivity: $\lambda = 0,038 \text{ W/mK}$
- density: approx. 33 kg / m^3
- color: black

Item no.	Order designation	Strength	Width	Roll length
409-001	Vorlegeband schwarz 2 x 6	2 mm	6 mm	10 rm
409-003	Vorlegeband schwarz 2 x 9	2 mm	9 mm	20 rm
409-004	Vorlegeband schwarz 2 x 10	2 mm	10 mm	20 rm
409-005	Vorlegeband schwarz 2 x 12	2 mm	12 mm	20 rm
409-006	Vorlegeband schwarz 2 x 15	2 mm	15 mm	20 rm
409-007	Vorlegeband schwarz 2 x 20	2 mm	20 mm	20 rm
409-008	Vorlegeband schwarz 2 x 30	2 mm	30 mm	20 rm
409-013	Vorlegeband schwarz 3 x 6	3 mm	6 mm	10 rm
409-015	Vorlegeband schwarz 3 x 9	3 mm	9 mm	20 rm
409-016	Vorlegeband schwarz 3 x 10	3 mm	10 mm	20 rm
409-017	Vorlegeband schwarz 3 x 12	3 mm	12 mm	20 rm
409-018	Vorlegeband schwarz 3 x 15	3 mm	15 mm	20 rm
409-019	Vorlegeband schwarz 3 x 20	3 mm	20 mm	20 rm
409-021	Vorlegeband schwarz 3 x 30	3 mm	30 mm	20 rm
409-023	Vorlegeband schwarz 3 x 50	3 mm	50 mm	20 rm
409-025	Vorlegeband schwarz 3 x 60	3 mm	60 mm	20 rm
409-029	Vorlegeband schwarz 4 x 9	4 mm	9 mm	20 rm
409-030	Vorlegeband schwarz 4 x 10	4 mm	10 mm	20 rm
409-031	Vorlegeband schwarz 4 x 12	4 mm	12 mm	20 rm
409-032	Vorlegeband schwarz 4 x 15	4 mm	15 mm	20 rm
409-033	Vorlegeband schwarz 4 x 20	4 mm	20 mm	20 rm
409-035	Vorlegeband schwarz 4 x 30	4 mm	30 mm	20 rm
409-038	Vorlegeband schwarz 4 x 50	4 mm	50 mm	20 rm
409-044	Vorlegeband schwarz 5 x 10	5 mm	10 mm	10 rm
409-045	Vorlegeband schwarz 5 x 12	5 mm	12 mm	10 rm
409-046	Vorlegeband schwarz 5 x 15	5 mm	15 mm	10 rm
409-047	Vorlegeband schwarz 5 x 20	5 mm	20 mm	10 rm
409-049	Vorlegeband schwarz 5 x 30	5 mm	30 mm	10 rm
409-051	Vorlegeband schwarz 5 x 50	5 mm	50 mm	10 rm
409-061	Vorlegeband schwarz 6 x 40	6 mm	40 mm	10 rm
409-062	Vorlegeband schwarz 6 x 50	6 mm	50 mm	10 rm
409-084	Vorlegeband schwarz 6 x 60	6 mm	60 mm	10 rm
409-077	Vorlegeband schwarz 10 x 40	10 mm	40 mm	10 rm
409-078	Vorlegeband schwarz 10 x 50	10 mm	50 mm	10 rm
Other dimensions on request				

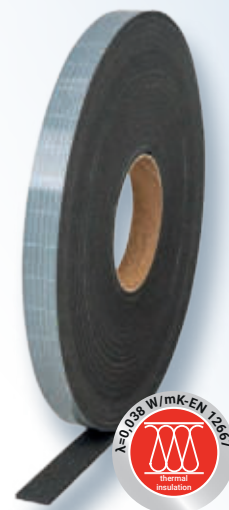

Vorlegeband Extra

PE sealing tape, self-adhesive on one side, without additional foil

- foamed, closed-cell, plasticizer-free glazing tape
- glazing tape for window glazings, sealings of windows and doors, thermal and acoustic decoupling of components, e.g. dry construction stud walls, sealing of air ducts in air conditioning and ventilation systems
- one-sided self-adhesive
- supplied with internal adhesive layer - the removal and disposal of the protective film is omitted (unlike Vorlegeband)
- excellent thermal insulation; thermal conductivity: $\lambda = 0,034 \text{ W/mK}$
- density: approx. 33 kg / m^3
- compression hardness 25%: 38 kPa
- color: black

Item no.	Order designation	Strength	Width	Roll length
409-317	Vorlegeband Extra schwarz 2 x 6	2 mm	6 mm	25 rm
409-300	Vorlegeband Extra schwarz 2 x 9	2 mm	9 mm	25 rm
409-316	Vorlegeband Extra schwarz 2 x 12	2 mm	12 mm	25 rm
409-312	Vorlegeband Extra schwarz 2 x 20	2 mm	20 mm	25 rm
409-337	Vorlegeband Extra schwarz 2 x 25	2 mm	25 mm	25 rm
409-301	Vorlegeband Extra schwarz 3 x 9	3 mm	9 mm	25 rm
409-306	Vorlegeband Extra schwarz 3 x 12	3 mm	12 mm	25 rm
409-313	Vorlegeband Extra schwarz 3 x 20	3 mm	20 mm	25 rm
409-319	Vorlegeband Extra schwarz 3 x 30	3 mm	30 mm	25 rm
409-320	Vorlegeband Extra schwarz 3 x 40	3 mm	40 mm	25 rm
409-326	Vorlegeband Extra schwarz 3 x 50	3 mm	50 mm	25 rm
409-302	Vorlegeband Extra schwarz 4 x 9	4 mm	9 mm	25 rm
409-311	Vorlegeband Extra schwarz 4 x 12	4 mm	12 mm	25 rm
409-307	Vorlegeband Extra schwarz 4 x 15	4 mm	15 mm	25 rm
409-339	Vorlegeband Extra schwarz 4 x 25	4 mm	25 mm	25 rm
409-335	Vorlegeband Extra schwarz 4 x 30	4 mm	30 mm	25 rm
409-303	Vorlegeband Extra schwarz 5 x 9	5 mm	9 mm	10 rm
409-340	Vorlegeband Extra schwarz 5 x 25	5 mm	25 mm	10 rm
409-336	Vorlegeband Extra schwarz 5 x 30	5 mm	30 mm	25 rm
409-344	Vorlegeband Extra schwarz 5 x 40	5 mm	40 mm	10 rm
409-304	Vorlegeband Extra schwarz 6 x 9	6 mm	9 mm	10 rm
409-310	Vorlegeband Extra schwarz 6 x 15	6 mm	15 mm	10 rm
409-329	Vorlegeband Extra schwarz 6 x 20	6 mm	20 mm	10 rm
Other dimensions on request				

Folienband DUO Easy 240

self-adhesive foil tape for the inner and outer joint

- for sealing the building connection joint inside AND outside
- compensation of movements due to elasticity of the foil tape
- optimal use even with hinged window elements
- suitable for refurbishment and new construction
- system tested according to ÖNORM B 5320
- humidity-variable s_d value: 0.48 to 12 m - depending on the ambient conditions
- driving rain tightness: > 1.050 Pa
- airtight: $a_n < 0.1$
- high adhesive strength of the fastening strip
- 12 months UV resistant
- can be easily plastered and painted over
- reversible for a short time
- shelf life: 24 months
- meets the requirements of ecological building materials (contains no phthalates, halogen compounds, flame retardants, etc.)
- very low emission – EMICODE EC1^{PLUS}
- DUO Easy+ has an additional adhesive tape on the backside.



Item number	Order designation	Roll length	Rolls per box	Box content
509-280	DUO Easy 240, 75 mm	25 rm	5	125 rm
509-281	DUO Easy 240, 100 mm	25 rm	4	100 rm
509-282	DUO Easy 240, 150 mm	25 rm	2	50 rm
509-283	DUO Easy 240, 200 mm	25 rm	2	50 rm
509-285	DUO Easy 240, 300 mm	25 rm	1	25 rm
509-290	DUO Easy+ 240, 75 mm	25 rm	5	125 rm
509-291	DUO Easy+ 240, 100 mm	25 rm	4	100 rm
509-292	DUO Easy+ 240, 150 mm	25 rm	2	50 rm
509-293	DUO Easy+ 240, 200 mm	25 rm	2	50 rm
509-294	DUO Easy+ 240, 300 mm	25 rm	1	25 rm

Other dimensions on request

How to install foil tape



Folienband FA Easy Soft 240

full-surface adhesive foil tape for the outer joint

- for sealing the outside construction joint according to ÖNORM B 5320
- system tested according to ÖNORM B 5320
- vapor permeable; s_d value: 0,8 m
- driving rain tightness: up to 1.050 Pa
- high adhesive power
- can be easily plastered over
- very low emission – EMICODE EC1^{PLUS}
- FA Easy+ Soft has an additional adhesive tape on the backside



Item number	Order designation	Roll length	Rolls per box	Box content
509-721	FA Easy Soft 240, 75 mm	25 rm	5	125 rm
509-722	FA Easy Soft 240, 100 mm	25 rm	4	100 rm
509-724	FA Easy Soft 240, 150 mm	25 rm	2	50 rm
509-726	FA Easy Soft 240, 200 mm	25 rm	2	50 rm
509-728	FA Easy Soft 240, 300 mm	25 rm	1	25 rm
509-731	FA Easy+ Soft 240, 75 mm	25 rm	5	125 rm
509-732	FA Easy+ Soft 240, 100 mm	25 rm	4	100 rm
509-734	FA Easy+ Soft 240, 150 mm	25 rm	2	50 rm
509-736	FA Easy+ Soft 240, 200 mm	25 rm	2	50 rm
509-738	FA Easy+ Soft 240, 300 mm	25 rm	1	25 rm

Other dimensions on request

Minimum order quantity: 150 mm: 1.000 rm; 200 mm: 700 rm; 300 mm: 500 rm

Folienband FI Easy 240

full-surface adhesive foil tape for the inner joint

- for sealing the inside construction joint according to ÖNORM B 5320
- vapor diffusion restraining: s_d value: > 10 m
- airtight: $a_n < 0.1$
- suitable for renovation and new construction
- high adhesive power
- can be easily plastered over
- shelf life: 24 months
- very low emission – EMICODE EC1^{PLUS}
- FI Easy+ has an additional adhesive tape on the backside



Item number	Order designation	Roll length	Rolls per box	Box content
509-701	FI Easy 240, 75 mm	25 rm	5	125 rm
509-702	FI Easy 240, 100 mm	25 rm	4	100 rm
509-706	FI Easy 240, 200 mm	25 rm	2	50 rm
509-708	FI Easy 240, 300 mm	25 rm	1	25 rm
509-711	FI Easy+ 240, 75 mm	25 rm	5	125 rm
509-712	FI Easy+ 240, 100 mm	25 rm	4	100 rm
509-716	FI Easy+ 240, 200 mm	25 rm	2	50 rm
509-718	FI Easy+ 240, 300 mm	25 rm	1	25 rm

Other dimensions on request

Minimum order quantity: 100 mm: 100 rm; 200 mm: 700 rm; 300 mm: 500 rm

Anschlussflansch

for connecting the window-sealing to the building-waterproofing

- used to create a water-stopping connection for floor-to-ceiling window and door elements
- excellent adhesion to all commercially available surfaces and bitumen
- available for mounting on both sides or one side
- meets the requirements of ÖNORM B 3691, ÖNORM B 3692 and DIN 18533
- size 200 x 300 mm

NEW
PRODUCT




Item number	Order designation
407-900	Set Anschlussflansch alternating
407-901	Set Anschlussflansch one-sided

Packaging unit: 1 set contains: 16 x Anschlussflansch, 1 x cartridge 290 ml Flanschdicht, 16 x plaster fleece, 16 x screw units (4 x wood screws and 4 x screws with drill bit), 1 assembly instruction, 1 processing instruction

3 easy steps to the perfect connection

- Apply a bead of Flanschdicht to the groove of the Anschlussflansch and then attach it to the window or door element with 4 screws
- Place the Anschlussflansch at least 150 mm above the finished floor level (FFL) and flush with the outer side of the window or door element.
- Ensure that the Anschlussflansch is bonded to the building structure (masonry) without wrinkles or tension.

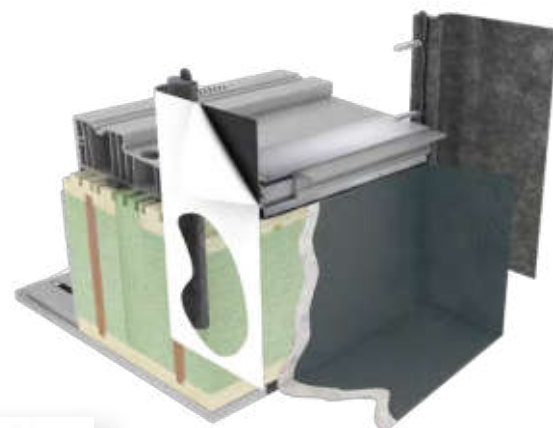

The following products can be used to make the connection on the INSEBO® Anschlussflansch backwater-tight:

Liquid seals:

- Frankasil 1K und Frankolon 2K
- REVDUPUR WP 200
- Triflex PRODetail, Triflex Smartec
- RALMO-Flüssigabdichtung ÖKO
- Kemperol 2K PUR
- Botament RD2 The Green One und Botament RD1 Universal
- Remmers MB 2K
- Sikafloor 405 und Sika IgoDicht 2K-P
- Sopro Dichtschlämme Flex RS 623, Sopro Turbo-Dichtschlämme 2K TDS 823, Sopro ZR-Turbo Reaktivabdichtung, Sopro ZR Turbo XXL Reaktivabdichtung 2K 618, Sopro ZR-Turbo Max sowie Sopro KellerDicht 1K KD 752 und Sopro KellerDicht 2K KD 754
- maxit AD-1K-Außendicht und maxit SDS 16
- Hähne - IMBERAL DAB 30P und DAKORIT PUR1K 30P
- Enkolan Abdichtung 1K LF, Enkoput, Enkryl
- Weecryl 110
- Elapro 1K-Sil

- Bauder LIQUITEC PU
- weber.tec Superflex D2 und weber.tec Superflex D24
- Kaubiflex FA Dichtschlämme 1K und 2K, Kaubiflex FA Dichtschlämme AS 1K und 2K, Kaubiflex FA 2K TT-Flex
- WIDOCRYL-Detail
- PCI Barraseal Turbo
- PCMB PCI Pecimor 2K

Linings:

- RALMO-Tape 4000, RALMO-EPDM
- TOPLINE-Türanschlussband
- Blumenbahnen (kalt oder geflämt)

INSEBO®
SOLUTIONS THAT MATTER

insebo.com

NEW
PRODUCT



Flanschdicht

sealant and adhesive for INSEBO® Anschlussflansch

- waterproof and airtight after curing
- very good adhesion on purenate, bitumen and PE
- very good paintability according to DIN 52452
- for interior and exterior use
- weather resistant
- solvent, isocyanat and silicone free
- one cartridge is included in each Anschlussflansch set

Item number	Order designation	Content
407-902	Flanschdicht	290 ml cartridge
Packing unit: 12 cartridges/box		

Folienprimer

primer for foil tapes on porous surfaces

- first coat for foil tapes
- applicable with Folienband DUO Easy 240, Folienband FI Easy 240 and Folienband FA Easy Soft 240
- for absorbent substrates
- ready-to-use mixture for application with a brush
- solventless
- free of plasticizers
- colorless



Item number	Order designation	Content
509-500	Folienprimer	400 ml
Packing unit: 8 pieces/box		

PRODUCT OVERVIEW

LUBRICANTS, SPRAYS & CLEANERS

Helpers in bottles and cans: Lubricants, sprays and cleaners make life, building and renovation easier.

Our special products complete our product range and simplify many works - on woodworking machines, in molding and injection molding or in the cleaning of PVC window profiles.

- 64 Zinkspray
- 64 Kunststoffreiniger
- 65 Silikonspray
- 65 Gleitmittel M

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website ([insebo.com](https://www.insebo.com)).

Zinkspray

temperature resistant corrosion protection

- for quick repairs of damaged zinc layers as well as damaged areas on galvanized steel parts
- for the renewal of destroyed primers
- extensive rust protection coating
- good electrical conductivity - therefore usable as spot paint on welded seams
- fast curing
- can also be used without primer

Item number	Order designation	Content
303-005	Zinkspray 400 ml	400 ml spray can
Packing unit: 12 spray cans/box		



Silikonspray

lubricates stain-free and invisible

- oil and grease-free protective, lubricating and release agent and care product
- suitable for plastics, wood, rubber and metals
- excellent release agent for molding and injection molding, as an assembly aid for hose connections as well as in wood and paper processing
- for lubricating cylinder locks, hinges, car door seals, sunroofs, seat rails and safety belt winders
- clean, resin-free sliding and lubricant film
- good temperature resistance
- protects against oxidation and corrosion
- water repellent and antistatic

Item number	Order designation	Content
301-001	Silikonspray 300 ml	300 ml spray can
Packing unit: 12 spray cans/box		



Kunststoffreiniger

dissolves grease, oil and dirt

- special cleaner for PVC window profiles and other plastics
- Improves the adhesion of sealants in many cases
- for removal of contaminants resulting from processing, transport or assembly - stains, pencil marks etc.
- suitable for removing uncured silicone residues
- color:less
- perform compatibility test before use
- only for professional and industrial use (not for private users)

Item number	Order designation	Content
304-052	Kunststoffreiniger 1 l	1 l metal canister
Packing unit: 3 metal canisters/box		



Gleitmittel M

for woodworking machines and many other applications

- lets wood glide effortlessly when working on planers, milling machines, assembly tables, etc.
- silicone-free, therefore no impairment when pickling, varnishing, veneering or gluing
- ready to use
- colorless
- only for professional and industrial use (not for private users)

Item number	Order designation	Content
302-058	Gleitmittel M 5 l	5 l metal canister
Packing unit: 2 metal canisters/box		



PRODUCT OVERVIEW

PROCESSING TOOLS

**Properly dosed, precisely glued, perfectly pressed:
our processing tools make it easier.**

Even INSEBO® products do not apply themselves on their own - that is why we have expanded our range of processing tools: Discover a whole world of presses for cartridges and aluminium bags as well as guns for PU foam cans.

- 68 PU-Schaum-Pistole 2000
- 68 Dosierpistole Metall Lite Plus
- 69 Dosierpistole Guardia X7
- 69 Scuro Evo 6 **NEW!**
- 69 Dosierpistole Metall Lite XL
- 70 Kartuschenpresse eXcePt-310
- 70 Halbschalenpresse HPS56
- 70 Skelettpresse X7
- 71 Profi-Kartuschenpresse XP-DELTA
- 71 Kartuschenpresse FX7-90
- 71 Alurohrpresse FX7-60
- 72 Druckluftpresse B600
- 72 Mörtelpresse X7-1000
- 73 Fugenspachtel-Set
- 73 Universal-Fugenspachtel

For more information about our products and the correct application please observe our technical and safety data sheets which you can read and download conveniently on our website (insebo.com).

PU-Schaum-Pistole 2000

the dispensing gun for the best foam quality

- high quality dispensing gun with brass setting wheel and metal ball in the valve
- exact dosing and optimal foam quality
- for inaccessible areas, two extension tubes and two tips for narrow openings are included
- the plastic tubes supplied in the original box are to be used for exposed areas that can not be reached directly with the dispensing gun

- brass tips especially made for the PU-Schaum-Pistole 2000 can be ordered additionally. They are suitable for particularly narrow and deep joints. The brass tips are available as 5-cm- or 20-cm-version packed in sets of 5 pieces including the packaging in hangers.



PU-Schaum-Pistole 2000 with INSEBO® Logo



PU-Schaum-Pistole 2000 with company neutral layout

Item number	Order designation	Note
113-012	PU-Schaum-Pistole 2000 INSEBO®	with INSEBO® Logo
113-003	PU-Schaum-Pistole 2000	company neutral
113-035	Screw-on tip for dispensing gun 5 cm 5-piece-set	
113-036	Screw-on tip for dispensing gun 20 cm 5-piece-set	




Dosierpistole Metall Lite Plus

high-quality metal gun with chrome-plated transport tube

- solid metal foam gun
- PTFE coated needle and can adapter
- large brass adjusting screw
- tapered extrusion tube for high
- rubberized handle for superior grip

Item number	Order designation
610-005	Dosierpistole Metall Lite Plus

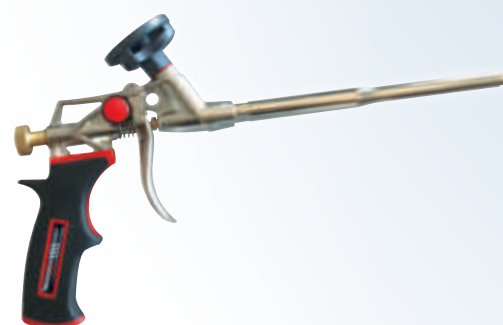

Dosierpistole Guardia X7

the professional processing tool for precise work

- new, solid construction
- complete stickresistant PTFE-coating
- optimized, stronger can adaptor
- very good foam flow
- precise foam adjusting with endstop-function
- rubber-coated handle and trigger

Item number	Order designation
610-006	Dosierpistole Guardia X7



NEW
PRODUCT

Scuro Evo 6

completely non-stick coated and high-quality metal gun

- high-quality metal gun
- completely non-stick coated
- brass tip thread
- low weight
- brass pistol attachment 5 cm
- 4-fold long-life seal
- easy and precise adjustment with quick-stop function in the trigger
- magazine with 2 brass tips
- ergonomic handle

Item number	Order designation
610-016	Scuro Evo 6



Dosierpistole Metall Lite XL

the extra long foam gun for special applications

- sturdy metal foam applicator with 60cm tube
- rubber coated handle
- non-slip brass adjusting knob
- developed for the filling of wall openings, effortless working in confined spaces and foaming without a ladder

Item number	Order designation
610-009	Dosierpistole Metall Lite XL



Kartuschenpresse Stop&Go

robust cartridge press with strong transmission ratio

- integrated afterflow-stop function
- also optimally suited for viscous sealants and adhesives
- pleasant working due to rubberized handle
- integrated nozzle cutting knife
- corrosion protected push and drive parts
- with practical ladder hook
- transmission ratio 19: 1



Item number	Order designation
213-011	Kartuschenpresse Stop&Go

Profi-Kartuschenpresse XP-DELTA

highest quality with switchable trigger ratios

- rotary carriage and ladder hook
- rubber-coated handle and trigger
- anticorrosive performance
- activatable dripless function
- DELTA catch plate, extremely tough and durable
- switchable trigger ratios: 25:1 and 12:1



Item number	Order designation
621-012	Profi-Kartuschenpresse XP-DELTA

Halbschalenpresse HPS56

low weight and good transmission ratio

- compact and ergonomic design and simple one-handed operation for fatigue-free working
- easy and quick cartridge exchange
- no afterflowing of the sealant or adhesive by activating the backstop with a press of the thumb
- for sealant and adhesive cartridges
- with practical ladder hook
- transmission ratio 13: 1



Item number	Order designation
621-006	Halbschalenpresse HPS56

Kartuschenpresse FX7-90

high-quality sealant press for especially viscous sealants

- rotary carriage
- rubber-coated handle and trigger
- double slide bearings for smooth-running function
- multiple-strength thrust block
- ladder hook
- for high viscosity dispensing material
- trigger ratio 17:1



Item number	Order designation
621-008	Kartuschenpresse FX7-90

Skelettpresse X7

handy cartridge press for do-it-yourselfers and professionals

- low weight, handy cartridge press
- no afterflowing during work interruptions due to automatic tension release
- for sealant and adhesive cartridges
- includes needle for piercing the cured foam in the nozzle
- with practical ladder hook
- transmission ratio 7:1



Item number	Order designation	Color
621-004	Skelettpresse X7	black

Alurohrpresse FX7-60

high quality for cartridges and aluminium bags

- rotary carriage
- aluminum union nuts
- rubber-coated handle and trigger
- double slide bearings for smooth running function
- multiple-strength thrust block
- push plate optimized for complete emptying
- for high viscosity dispensing material
- trigger ratio 17:1



Item number	Order designation
622-009	Alurohrpresse FX7-60

Druckluftpresse B600

handy, easy to operate sealant press for effortless application

- anodized aluminium tube
- optimized centre of gravity axis
- minimal air consumption
- working pressure 6-10 bar
- easy pressure regulation and excellent dosage adjustment



Item number	Order designation
622-013	Druckluftpresse B600



Mörtelpresse X7-1000

for exactly filled mortar joints

- for optimal processing of grout
- not suitable for masonry mortar, screed and other coarse-grained mixtures
- joints can be completely filled without dirt around the edge
- available wearing parts (plastic filling tube, piston rubber, replacement tips)
- dosing tip with small opening for narrow, fine joints
- dosing tip with large opening for wider joints
- filling capacity: approx. 1.000 ml
- Wide chatch plate
- metal screw connection with handle
- rubber-coated handle and trigger
- retaining clip secures tube
- with metal shovel for easy filling



Item number	Order designation
630-001	Mörtelpresse X7-1000

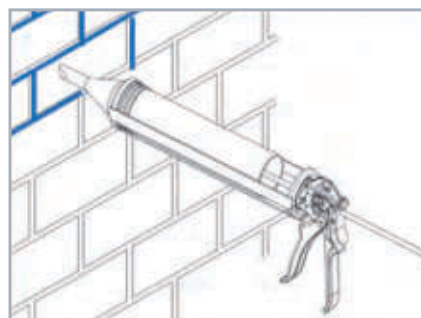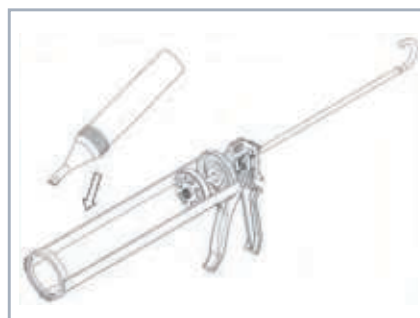

Fugenspachtel-Set

practical spatulas for small and large joints

- one piece triangular-shaped (3, 5 and 9 mm)
- one piece round-shaped (6, 8, 10 and 14 mm)
- two pieces triangular-shaped (6, 8, 10 and 14 mm)
- made of robust special plastic
- for square and round joints
- for fast and clean grouting
- for an optimal, clean joint pattern



Item number	Order designation
213-020	Fugenspachtel-Set

Universal-Fugenspachtel

with practical rounding

- universal joint spatula for all sealants
- for easy smoothing of the joint surface
- fast, easy, clean, cost-saving
- suitable as silicone smoothing spatula for professional users
- dimension: approx. 5,8 cm x 11,4 cm



Item number	Order designation
213-001	Universal-Fugenspachtel

GENERAL SALES CONDITIONS

■ 1. General Regulations

All offers, deliveries and agreements are based exclusively on our general sales conditions.

Contrary statements on the part of the buyer indicating his own terms of business and purchase are herewith contradicted. Also, they shall not legally bind us, if the buyer declares his conditions as exclusive and we have not again objected to them at the time of the formation of the contract. Even without the written confirmation of the buyer, our conditions shall be deemed to have been fully accepted at the latest, when our goods or services are taken delivery of.

■ We reserve the rights of ownership and copyright in illustrations, drawings, calculations and other documents. These documents shall not be made accessible to third parties.

■ 2. Terms of payment

All payments are to be made by the purchaser directly to us. Our sales representatives are only authorized to receive payment if they have been granted explicit written authorization from us for a specific case.

■ Unless otherwise agreed upon, the following applies: payment in full, without any deductions, is due within 20 days. Bills of exchange and cheques will not be accepted

■ If the agreed payment period is exceeded, we reserve the right to charge interest at the current valid default interest rate, but at least at a rate of 12% per annum, with interest capitalized quarterly. Additionally, the buyer is responsible for paying adequate reminder charges and collection costs of all sorts. This does not preclude the assertion of any further claims.

■ If the purchaser is overdue with a payment for longer than 10 days, the entire sum of all outstanding debts will become immediately due for payment after a written reminder. After setting an appropriate period of grace, we are entitled to withdraw from the agreement and demand return of the goods delivered.

■ Any delay of payments or settling of accounts due to eventual disputed counterclaims from the buyer are not valid.

■ 3. Reservation of title

All delivered goods shall remain our property (reserved goods) until the ordering party has fulfilled all payment obligations. The reservation of title also relates to the new products, which are produced by processing or combination of our goods. If the buyer resells the products within the framework of a proper business transaction, all claims from the resale amounting to our demands is given to us. Upon request, the purchaser is obliged to inform us of the name of the third party debtor and the amount of the claim against this one.

■ The customer should notify us without undue delay of any third-party seizure. Pledging of the goods by the customer is not permitted.

■ 4. Trade mark rights

In contract manufacturing with predetermined prescriptions and equipment the purchaser has the responsibility that no copyrights of third parties are violated by the production and supply of the goods. The buyer agrees to indemnify us against claims for damages or other claims by third parties and related costs of all kinds and to reimburse us for direct and indirect damages and expenses incurred from the infringement of any proprietary rights.

■ 5. Delivery period

Delivery periods quoted by us are not binding, unless these have not been expressly agreed as fixed dates. Furthermore, the specified delivery periods are only insofar binding for us, as we are not prevented by war, breakdowns, shortage of raw materials, transport disruptions or disposal of force majeure from fulfilling the order. Such events entitle us to completely or partially withdraw from the contract without giving the buyer the right to claim damages. If there is no fixed delivery period, the contracting parties are considered to have agreed on „prompt delivery“. However, we reserve the right to extend our delivery time by a maximum of 4 weeks in all cases. If the goods have already been completed on the contractual delivery date and the acceptance is required, they will be stored on our premises at the expense and risk of the purchaser.

Unless specified otherwise by the purchaser, we select what we consider to be the best type of dispatch and the best route of shipment, but without any guarantee. Partial deliveries are permitted. We reserve the right to standard deliveries over and under 5% of the contracted quantities.

■ If the buyer does not accept the quantity of goods in their entirety, we may, without prejudice to any other rights, charge a small order surcharge. For orders under 40,- EUR - a surcharge of 4,- EUR per invoice can be additionally charged.

■ The liability of the delivery and a possibly agreed delivery date apply only if the supply of all raw materials processed in the product is guaranteed. Compensation for late delivery, in particular contractual penalties in delivery contracts or general terms and conditions are expressly excluded.

■ 6. Transfer of risk

In principle, deliveries are made ex works without specially agreed terms of delivery.

■ Our delivery duty shall be deemed to have been wholly fulfilled and the risk shall pass in every aspect to the customer as soon as the goods have left our factory. This also applies in the case, when the goods are delivered by us freight free. Any transport or other insurance coverage shall be the responsibility of the customer. All damages to the goods during transport or missing parts must be noted immediately and confirmed by signature of the delivery person (for example: truck driver). Goods, which is agreed shall be collected by the customer will, from the time at which the customer has been notified of readiness for collection, be preserved at his own risk. If the buyer fails to perform its duty of collection, we may demand reasonable compensation for the storage.

■ 7. Notice of defects

All information about product characteristics is based on our experiences and technical knowledge of our suppliers. They do not release the purchaser and user of application-related aptitude tests. Product liability compensation is excluded in any case.

■ Our technical advice shall be occurring orally, in writing, or by trials to the best of the company's knowledge, but is only considered non-binding advice.

It does however not release the purchaser and user from the duty to check by himself, if the products supplied by are suitable for the intended processes and purposes. Application and processing of the products take place beyond our control possibilities and lie therefore exclusively in the responsibility of customers and users.

■ On pain of losing his entitlement to assert claims, the client must notice defects immediately after the shipment arrives at the destination, correctly, in writing and in detail and documented by submission of samples of the rejected goods. 10 days after the receipt of the shipment no more complaint is admissible. Small commercial or technically unavoidable deviations in colour, size and quality of the equipment cannot be the subject of a complaint. Decisive for quality and workmanship of any order are the average failure patterns, which are presented to the purchaser on his request.

■ In the case of justified reclamation, the buyer has the right to exchange the goods, provided that the claimed goods are in their original condition. In no case, complaints entitle the purchaser to claim for damages, conversion, reduction or withdrawal from the contract.

■ Our data on the properties, processing and application of our products is based on scrupulous tests and practical experience. However, they are without any obligation and do not relieve the buyer from his obligation to ensure himself by adequate tests, that he can achieve the intended result with our products.

Damage claims will only be accepted up to the amount of the value of the goods. Further claims (especially consequential damages and distorted shapes) and claims for consequential costs shall be excluded. No liability - also in patent rights - can be assumed in individual cases.

■ 8. Place of performance and jurisdiction

The place of performance for all of our deliveries is our company headquarters. Performance place for the purchaser's obligations is Himberg near Vienna.

WS INSEBO GmbH
Industriestraße 24
A-2325 Himberg

Tel.: +43 2235 / 86227 - 0
E-Mail: office@insebo.com
Website: insebo.com

